

08/26/00  
jc890 U.S. PTO

08 2800

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (1/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. GR1-2790-U  
First Inventor or Application Identifier MATHUR, Vijay  
Title MULTI-PHASE CALCIUM SILICATE HYDRATES, METHODS FOR THEIR PREPARATION AND IMPROVED PAPER AND PIGMENT PRODUCTS, et al.  
Express Mail Label No. EK389892070US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☐ \*Please charge the fees indicated on the attached fee transmittal and credit overpayments or charge any and all fees due throughout the pendency of this application to Deposit Account No. 07-1613.
2. ☒ Specification [Total Pages **78**]  
(preferred arrangement set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **22**]
4. Oath or Declaration [Total Pages **5**]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☒ \* Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired  
(PTO/SB/09-12)
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☒ Other: **Appendix 1 - 7 pages**

\* A new statement is required to be entitled to pay small entity fees, except where one has been filed in a prior application and is being relied upon.

## 17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_  
Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_


## 18. CORRESPONDENCE ADDRESS

<input checked="" type="checkbox"/> Customer Number or Bar Code Label	20793	or <input type="checkbox"/> Correspondence address below	
(Insert Customer No. or Attach bar code label here)			
Name			
Address			
City	State	Zip Code	
Country	Telephone	Fax	
Name (Print/Type)	R. Reams Goodloe, Jr.	Registration No. (Attorney/Agent)	32,466
Signature	<i>R. Reams Goodloe, Jr.</i>	Date	08/26/2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

**CERTIFICATE OF MAILING**

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below in an envelope as "Express Mail Post Office to Addressee" mailing Label Number EK389892070US addressed to:  
Assistant Commissioner for Patents  
Washington, D.C. 20231

  
Signature of Depositor

Rhonda Goodloe  
Print Name of Depositor

Date: August 26, 2000

**IN THE UNITED STATES**

**PATENT AND TRADEMARK OFFICE**

Attention: Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

**NEW APPLICATION TRANSMITTAL**

Transmitted herewith for filing is the patent application  
of:

Inventor(s): MATHUR, Vijay K.

For: (Title): MULTI-PHASE CALCIUM SILICATE HYDRATES, METHODS  
FOR THEIR PREPARATION, AND IMPROVED PAPER AND PIGMENT  
PRODUCTS PRODUCED THEREWITH

**1. Type of Application**

This new application is for a(n)

- ☒ Original (nonprovisional)
- ☐ Design
- ☐ Divisional
- ☐ Continuation
- ☐ Continuation-In-Part (CIP)

2. **Benefit of Prior U.S. Application(s) (35 U.S.C. §§ 119(e), 120, or 121).**

- ☒ The new application being transmitted claims the benefit of prior U.S. application(s). Enclosed are ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.

3. **Papers Enclosed**

A. Required for filing date under 37 C.F.R. § 1.53(b) (Regular) or 37 C.F.R. § 1.153 (Design) Application

70 Pages of specification

7 Pages of claims

22 Sheets of formal drawings (Figs. 1-39)

B. **Other Papers Enclosed**

5 Pages of declaration and power of attorney

1 Pages of abstract

X Other (Return Receipt Postcard); 7 pages of Abstract

4. **Additional papers enclosed**

- ☐ Preliminary Amendment  
☐ Information Disclosure Statement (37 C.F.R. § 1.98)  
☐ Form PTO-1449  
☐ Citations

5. **Declaration or Oath (including Power of Attorney)**

- ☒ Enclosed  
Executed by the inventors  
☐ Not enclosed

6. **Inventorship Statement**

The inventorship for all the claims in this application are:

- ☐ The same  
☐ Not the same. An explanation, including the ownership of the various claims at the time the last claimed invention was made,

- ☐ is submitted.  
☐ will be submitted.

7. Language

☒ English

8. Assignment

☐ An assignment of the invention to  
G.R. INTERNATIONAL, INC.

- ☐ is attached. Form PTO 1595 is also attached.  
☐ will follow.

9. Certified Copy

Certified copy(ies) of application(s):

Country	Appln. No.	Filed
---------	------------	-------

Country	Appln. No.	Filed
---------	------------	-------

from which priority is claimed

- ☐ is (are) attached.  
☐ will follow.

10. Fee Calculation (37 C.F.R. § 1.16)

A. ☒ Regular Application

CLAIMS AS FILED			
Number Filed	Number Extra	Rate	Basic Fee 37 CFR. §1.16(a) \$690.00
Total Claims (37 CFR § 1.16c)) <u>38</u> - 20 =	<u>18</u>	X \$18.00	\$ <u>324.<sup>00</sup></u>
Independent Claims (37 CFR § 1.16b)) <u>4</u> - 3 =	<u>1</u>	X \$78.00	\$ <u>78.<sup>00</sup></u>
Multiple dependent claims (37 CFR § 1.16)) <u>✓</u>		+ \$260.00	\$ <u>260.<sup>00</sup></u>

1352

- ☐ Amendment canceling extra claims is enclosed.  
☐ Amendment deleting multiple-dependencies is enclosed.  
☐ Fee for extra claims not being paid at this time.

FILING FEE CALCULATION: \$ 1352.<sup>00</sup>

- B. ☐ Design application  
(\$310.00 - 37 C.F.R. § 1.16(f))  
FILING FEE CALCULATION: \$ \_\_\_\_\_

11. Small Entity Statement(s)

☒ Statement(s) that this is a filing by a small entity under 37 C.F.R. § 1.9 and 1.27 is (are) attached.

☐ Status as a small entity was claimed in prior application \_\_\_\_/\_\_\_\_, filed on \_\_\_\_\_ from which benefit is being claimed for this application under:

35 U.S.C. § ☐ 119 (e),  
☐ 120,  
☐ 121  
☐ 365 (c),

and which status as a small entity is still proper and desired.

☐ A copy of the statement in the prior application is included.

Filing Fee Calculation (50% of A, B, or C above).

\$ 676.<sup>00</sup>

12. Fee Payment Being Made At This Time

☐ Not enclosed.  
☐ No filing fee is to be paid at this time.

☒ Enclosed

☒ Filing Fee: \$ 676.<sup>00</sup>  
☐ Recording Assignment  
(\$40.00; 37 C.F.R. § 1.21 (h)) \$ \_\_\_\_\_

TOTAL FEES ENCLOSED: \$ \_\_\_\_\_

13. Method of Payment of Fees

☒ Check in the amount of \$ \_\_\_\_\_  
☐ Charge Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_.  
A duplicate of this transmittal is attached.

14. Authorization to Charge Additional Fees

☒ The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No.: 07-1613.

- ☒ 37 C.F.R. § 1.16(a), (f) or (g) (filing fees)
- ☒ 37 C.F.R. § 1.16(b), (c) and (d) (presentation of extra claims)
- ☒ 37 C.F.R. § 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)
- ☒ 37 C.F.R. § 1.17(a)(1)-(5) (extension fees pursuant to § 1.136(a)).
- ☒ 37 C.F.R. § 1.17 (application processing fees)
- ☐ 37 C.F.R. § 1.18 (issue fee at or before mailing of Notice of Allowance, pursuant to 37 C.F.R. § 1.311(b)).

15. Instructions as to Overpayment

☒ Credit Account No.: 07-1613.


Date: August 26, 2000

Phone: 253-859-9128

Fax: 253-859-8915

Customer

No.: 20793

  
SIGNATURE OF ATTORNEY

R. Reams Goodloe, Jr.  
Reg. No. 32,466

Suite 3  
10725 - S.E. 256<sup>th</sup> Street  
Kent, Washington  
98031-6426

☒ **Incorporation by reference of added pages**

- ☐ Plus Added Pages for New Application Transmittal  
Where Benefit of Prior U.S. Application(s) Claimed

Number of pages added: 3

- ☐ Plus Added Pages for Papers Referred to in Item 4  
above.

Number of pages added: \_\_\_\_\_

- ☐ Plus added pages deleting names of inventor(s)  
named in prior application(s) who is/are no longer  
inventor(s) of the subject matter claimed in this  
application.

Number of pages added: \_\_\_\_\_

☐ **Statement Where No Further Pages Added**

- ☐ This transmittal ends with this page.

ADDED PAGES FOR APPLICATION TRANSMITTAL WHERE BENEFIT OF  
PRIOR U.S. APPLICATION CLAIMED

16. Relate Back

☒ Amend the application by inserting, before the first line, the following sentence:

A. 35 USC § 119(e)

☒ "This application claims the benefit of U.S. Provisional Application(s) No(s).:

Application No.: 60/150,862 Filed: August 26, 1999

B. 35 USC §§ 120, 121 and 365(c)

- ☐ "This application is a
- ☐ continuation
  - ☐ continuation-in-part
  - ☐ divisional

of copending application(s)

- ☐ application number \_\_\_\_/\_\_\_\_ filed on \_\_\_\_.
- ☐ International Application \_\_\_\_ filed on \_\_\_\_ and which designated the U.S."
- ☐ "The nonprovisional application designated above, namely application \_\_\_\_/\_\_\_\_, filed \_\_\_\_ claims the benefit of U.S. Provisional Application(s) No.(s).:

Application No.: \_\_\_\_/\_\_\_\_ Filed: \_\_\_\_

17. Relate Back - 356 USC § 119 Priority Claim for Prior Application

The prior U.S. application(s), including any prior International Application designating the U.S., identified above in item 16B, in turn itself claim(s) foreign priority(ies) as follows:

Country	Application No.	Filed on
---------	-----------------	----------

The certified copy(ies) has (have)

- ☐ been filed on \_\_\_\_\_, in prior application  
\_\_\_\_\_/\_\_\_\_\_, which was filed on \_\_\_\_\_.
- ☐ is (are) attached.

**18. Maintenance of Copendency of Prior Application**

- A. ☐ Extension of time in prior application  
☐ A petition, fee and response extends the term in the pending prior application until \_\_\_\_\_.
- ☐ A copy of the petition filed in prior application is attached.
- B. ☐ Conditional Petition for Extension of Time in Prior Application  
☐ A conditional petition for extension of time is being filed in the pending prior application.
- ☐ A copy of the conditional petition filed in the prior application is attached.

**19. Further Inventorship Statement Where Benefit of Prior Application(s) Claimed**

- (a) ☐ This application discloses and claims only subject matter disclosed in the prior application whose particulars are set out above and the inventor(s) in this application are:

- ☐ the same.
- ☐ less than those named in the prior application. It is requested that the following inventor(s) identified for the prior application be deleted:

- 
- (b) ☒ This application discloses and claims additional disclosure by amendment and a new declaration or oath is being filed. With respect to the prior application, the inventor(s) in this application are:

- ☒ the same.
  - ☐ the following additional inventor(s) have been added:
-

- (c) ☒ The inventorship for all the claims in this application are:
- ☒ the same.
- ☐ not the same. An explanation, including the ownership of the various claims at the time the last claimed invention was made
- ☐ is submitted
- ☐ will be submitted.

**20. Abandonment of Prior Application**

- ☐ Please abandon the prior application at a time while the prior application is pending, or when the petition for extension of time or to revive in that application is granted, and when this application is granted a filing date, so as to make this application copending with said prior application.

**21. Small Entity (37 CFR § 1.28(a))**

- ☒ Applicant has established small entity status by the filing of a statement in parent application
- ☐ A copy of the statement previously filed is included.

**22. NOTIFICATION IN PARENT APPLICATION OF THIS FILING**

- ☐ A notification of the filing of this
- ☐ continuation
- ☐ continuation-in-part
- ☐ divisional

is being filed in the parent application, from which this application claims priority under 35 USC § 120.

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
STATUS (37 CFR 1.9(f) AND 1.27 (b)) - INDEPENDENT INVENTOR**

Docket No.  
GR1-2790-U

Serial No.

Filing Date

Patent No.

Issue Date

Applicant/

Patentee: **MATHUR, Vijay K.**
**Invention: MULTI-PHASE CALCIUM SILICATE HYDRATES, METHODS FOR THEIR PREPARATION, AND  
IMPROVED PAPER AND PIGMENT PRODUCTS PRODUCED THEREWITH**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled above and described in:

- ☒ the specification to be filed herewith.  
☐ the application identified above.  
☐ the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern or organization exists.  
☐ Each such person, concern or organization is listed below.

\*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities (37 CFR 1.27)

FULL NAME

ADDRESS

☐

Individual

☐

Small Business Concern

☐

Nonprofit Organization

FULL NAME

ADDRESS

☐

Individual

☐

Small Business Concern

☐

Nonprofit Organization

FULL NAME

ADDRESS

☐

Individual

☐

Small Business Concern

☐

Nonprofit Organization

FULL NAME

ADDRESS

☐

Individual

☐

Small Business Concern

☐

Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF INVENTOR Vijay K. Mathur

SIGNATURE OF INVENTOR 

DATE: August 26, 2000

NAME OF INVENTOR \_\_\_\_\_

SIGNATURE OF INVENTOR \_\_\_\_\_

DATE: \_\_\_\_\_

NAME OF INVENTOR \_\_\_\_\_

SIGNATURE OF INVENTOR \_\_\_\_\_

DATE: \_\_\_\_\_

NAME OF INVENTOR \_\_\_\_\_

SIGNATURE OF INVENTOR \_\_\_\_\_

DATE: \_\_\_\_\_

NAME OF INVENTOR \_\_\_\_\_

SIGNATURE OF INVENTOR \_\_\_\_\_

DATE: \_\_\_\_\_

NAME OF INVENTOR \_\_\_\_\_

SIGNATURE OF INVENTOR \_\_\_\_\_

DATE: \_\_\_\_\_

NAME OF INVENTOR \_\_\_\_\_

SIGNATURE OF INVENTOR \_\_\_\_\_

DATE: \_\_\_\_\_

NAME OF INVENTOR \_\_\_\_\_

SIGNATURE OF INVENTOR \_\_\_\_\_

DATE: \_\_\_\_\_

NAME OF INVENTOR \_\_\_\_\_

SIGNATURE OF INVENTOR \_\_\_\_\_

DATE: \_\_\_\_\_

NAME OF INVENTOR \_\_\_\_\_

SIGNATURE OF INVENTOR \_\_\_\_\_

DATE: \_\_\_\_\_

MULTI-PHASE CALCIUM SILICATE HYDRATES,  
METHODS FOR THEIR PREPARATION, AND IMPROVED PAPER AND  
PIGMENT PRODUCTS PRODUCED THEREWITH

5    **TECHNICAL FIELD**

          This invention relates to the manufacturing of novel calcium silicate hydrate ("CSH") crystalline structures, and to pigment products, and novel to paper products produced therewith.

10    **BACKGROUND**

          The paper industry currently utilizes many different types of fillers as a substitute for pulp fiber, as well as to provide desired functional and end-use properties to various paper and paper products. For example, clay has long been used as a filler or fiber substitute.

          Importantly, the use of clay also provides an improvement in print quality. However, one disadvantage of clay is that it is relatively low in brightness. And, the use of clay in papermaking leads to a decrease in tensile strength of the paper sheet, and to reductions in paper sheet caliper and stiffness.

Calcined clay was introduced to the paper industry in an effort to improve brightness and opacity in paper.

However, one significant economic limitation of calcined clay is that it is relatively expensive. Also, physically,  
5 calcined clay is highly abrasive.

Titanium dioxide,  $\text{TiO}_2$ , is another example of a filler commonly used in papermaking. Most commonly, titanium dioxide is used to improve opacity of the paper sheet, and, in some cases, it is used to improve sheet brightness as  
10 well. Use of titanium dioxide is limited, though, because it is extremely expensive. Unfortunately, it is also the most abrasive pigment on the market today. This is important because highly abrasive pigments are detrimental in the paper industry since they wear down critical paper  
15 machine components, such as forming wires, printing press plates, and the like, ultimately leading to high life cycle costs due to the constant repair and maintenance costs.

When calcined clay was first introduced, it was touted as a titanium dioxide extender. Although it did succeed in  
20 extending  $\text{TiO}_2$ , it is nonetheless abrasive, and it is more expensive than either standard clay or market pulp fiber.

More recently, and particularly since the mid 1980's, ground calcium carbonate(GCC) has been used as a low cost alkaline filler. Although GCC improved sheet brightness, one downside to GCC was that it too is abrasive. Moreover, use of GCC reduces tensile strength, caliper and stiffness of paper sheets. Consequently, a paper sheet containing GCC tends to be rather limp.

Finally, one of the most commonly used alkaline paper fillers is precipitated calcium carbonate(PCC). PCC is presently one of the best compromise solutions for providing a high brightness filler at an economically feasible price. However, a significant downside to the use of PCC in paper sheets is that PCC provides a lower light scattering power than either  $TiO_2$  or calcined clay. Also, it often reduces sheet strength and stiffness.

Thus, the paper industry still has an unmet need, and continues to look for, a multi-functional pigment that can simultaneously provide two or more of the following attributes:

- a) cost that are less than  $TiO_2$ ;
- b) better optical properties than calcined clay;
- c) better optical properties than GCC;
- d) better optical properties than PCC;

- e) minimal tensile strength loss associated with increased filler usage;
- f) at least some improved strength characteristics, such as sheet stiffness.

5

In addition to the just stated criteria, if a paper filler could also simultaneously improve sheet porosity (i.e., provide a more closed sheet) yet provide higher sheet caliper, it would be a very highly desired filler material. To date, no single paper filler with such attributes has been brought to the market. Consequently, the development and commercial availability of such a filler would be extremely desirable.

Finally, the current industry demand for printing papers, especially the rapidly increasing demand for ink jet paper, requires a high performance paper. The performance of such paper would be enhanced by the availability of a pigment that would provide excellent water and oil absorption capacities, so that the paper could quickly capture and prevent ink from spreading or bleeding, as well as aid in surface drying of the ink.

Some of the key requirements for an ideal papermaking pigment can be summarized as set forth in Tables 1, 2 and 3 below.

5 Table 1: Idealized Paper Filler Attributes

Sheet Attribute→	Opacity	Filler Scattering Coefficient	Sheet Scattering Power	Brightness
Industry Requirement →	HIGHER than pulp or carbonate fillers	HIGHER than pulp or carbonate fillers	HIGHER than pulp or carbonate fillers	EQUAL OR HIGHER than pulp or carbonate fillers

Table 2: Key strength parameters for an "Ideal" pigment.

Sheet Attribute →	Caliper	Bulk	Porosity	Sheet Smoothness	Stiffness	Tensile
Industry Requirement →	HIGHER than pulp sheet alone or with CaCO <sub>3</sub> fillers	HIGHER than pulp sheet alone or with CaCO <sub>3</sub> fillers	HIGHER than pulp sheet alone or with CaCO <sub>3</sub> fillers	HIGHER than pulp sheet alone or with CaCO <sub>3</sub> fillers	HIGHER than pulp sheet alone or with CaCO <sub>3</sub> fillers	HIGHER than pulp sheet alone or with CaCO <sub>3</sub> fillers

Table 3: Key printing requirements for an "Ideal" pigment.

Sheet Attribute →	Ink Penetration	Show Through	Print Through
Industry Requirement →	LOWER than pulp sheet alone or with CaCO <sub>3</sub> filler	LOWER than pulp sheet alone or with CaCO <sub>3</sub> filler	LOWER than pulp sheet alone or with CaCO <sub>3</sub> filler

Currently, the papermaking industry uses various combinations of available fillers in order to optimize the properties as may be desired in a particular papermaking application. However, because currently available fillers  
5 reduce sheet strength to at least some extent, the industry relies on strength additives, such as starch and/or polymers, to maintain the desired paper strength properties when fillers are utilized. Unfortunately, because different pigments have different particle charge  
10 characteristics, additions of multiple pigments and additives in the paper making system often create an extremely complicated chemical system which may be somewhat sensitive and difficult to control.

In summary, there remains a significant and as yet  
15 unmet need for a high quality, cost effective filler which can be used to simultaneously achieve desired optical properties and sheet strength in paper products. Further, there remains a continuing, unmet need for a method to reliably produce such a pigment which has desirable optical  
20 properties and which provides significant cost benefits when compared to the use of titanium dioxide or other pigments currently utilized in the production of paper.

## OBJECTS, ADVANTAGES AND NOVEL FEATURES

Accordingly, an important objective of my invention is to provide a process for the manufacture of unique calcium silicate hydrate ("CSH") products, which provide

5 crystalline structures with desired brightness, opacity, and other optical properties.

Another important and related objective is to provide an economical substitute for current paper fillers such as titanium dioxide.

10 A related and important objective is to provide a method for the production of novel paper products using my unique calcium silicate hydrate product.

An important objective is to provide a new calcium silicate hydrate product with low bulk density, good

15 chemical stability (particularly in aqueous solutions), and a high adsorptive capability, among other properties.

These and other advantages, and novel features of my multi-phase calcium silicate hydrates, the method for their preparation, and the improved pigments and paper products

20 produced therewith will become evident and more fully appreciated from full evaluation and consideration of the following detailed description, as well as the accompanying tables and drawing figures.

## SUMMARY

I have now discovered the process conditions required to reliably produce unique calcium silicate hydrate products with particularly advantageous properties for use  
5 as a filler in papermaking. The products are produced by reacting, under hydrothermal conditions, a slurry of burned lime (quick lime) and a slurry of fluxed calcined diatomaceous earth (or other appropriate starting siliceous material). Preferably, a fine slurry of each of the lime  
10 and the fluxed silica are utilized.

For one of my CSH products, the lime slurry is prepared by providing about 1.54 pounds of suspended solids per gallon of lime slurry. The silica slurry is prepared by providing about 1.55 pounds of suspended solids per gallon  
15 of water. The slaking of the lime slurry raises the temperature of the slurry to near the boiling point; this is accomplished before adding the same to the fluxed silica. The slurry of fluxed calcined diatomaceous earth is heated to near the boiling point, also, before it is  
20 mixed with the lime slurry. When both slurries are near atmospheric boiling point conditions, then they are mixed together and stirred, while being retained under pressure in an autoclave or similar reactor. Temperature of the

reaction slurry is raised to between about 245C and 260C,  
and the reaction is continued for about two hours, more or  
less. The CaO/SiO<sub>2</sub> ratio is maintained, in the feed  
materials, of about 1.35 (+/- about 0.10) moles CaO to 1  
5 mole of SiO<sub>2</sub>. After the reaction is completed, the product  
is cooled before the pressure is released and the product  
crystals are harvested.

Generally, the product of the above described reaction  
is a multi-phase mixture (i.e., two different forms or  
10 phases are present in the product), predominantly of  
foshagite, with some xonotlite. Importantly, small,  
haystack like particles containing complex multi-phase  
crystalline optical fibers are produced that can be  
advantageously employed in papermaking for coating and for  
15 wet end fillers. However, the hydrothermally produced  
multi-phase crystalline optical fibers are vastly improved  
over previously produced hydrothermal calcium silicate  
hydrates of which I am aware, at least with respect to  
their physical properties, their optical properties, and  
20 their utility as a filler in papermaking. Moreover, my  
unique CSH products are suitable for multiple end uses,  
such as filler for value added papers, for commodity  
papers, for newsprint, paper coating applications, as well

as for paints, rubber compositions, and other structural materials.

It is important to appreciate that my hydrothermal process for the manufacture of my unique multiple phase calcium silicate hydrates ("CSH's"), including my novel multi-phase mixture of foshagite and xonotlite, ( $\text{CaO}_4(\text{SiO}_3)(\text{OH})_2$  and  $\text{C}_6\text{Si}_6\text{O}_{17}(\text{OH})_2$ , respectively), results in a unique mixture of calcium silicate hydrates which have a unique and distinct X-ray diffraction pattern.

Further, the variables that affect the chemical composition of my CSH products, and the primary and secondary structure of the CSH particles and their characteristic properties, can be affected, among other things, by (a) the  $\text{CaO}/\text{SiO}_2$  mole ratio, by (b) concentration of the  $\text{CaO}$  and of the  $\text{SiO}_2$  in the reaction slurry, (c) the reaction temperature, and (d) the reaction time. By manipulating the just mentioned variables, I have been able to develop two novel pigment products. Those two products can be generally described as follows:

(1) A multi-phase calcium silicate hydrate having a primary phase of foshagite, and a secondary phase of xonotlite. I refer to this product as "TiSil" brand calcium silicate hydrate.

(2) A multi-phase calcium silicate hydrate complex having a primary phase fraction of riversidite with a minor phase fraction of xonotlite. I refer to this product as "StiSil" brand calcium silicate hydrate.

5       The first product is formed with a high CaO to SiO<sub>2</sub> mole ratio (about a 1 to 1, to about a 1.7 to 1 ratio of CaO to SiO<sub>2</sub>), at a high temperature (~200 °C - 300 °C), with a low final slurry concentration (~0.4 - 0.6 lb of solids per gallon of slurry), and with a reaction time of  
10       approximately 2 hours. It has a characteristic X-ray diffraction pattern as shown in Fig. 1. The scanning electron micrographs (SEMs) of this product are shown in Figs. 2 and 3. As is evident from the SEMs, this product consists of primary, fibrous particles joined together, and  
15       thus, produces a secondary, three dimensional, "hay-stack" structure. The physio-chemical characteristics of this product are unique. For example, extremely high water absorption is provided. This pigment also provides unique paper properties when utilized in papermaking. For  
20       example, this pigment, when used as a filler, can improve the optical properties along with sheet strength, sheet bulk, sheet smoothness, and sheet porosity, simultaneously.




The result of the unique properties and physical structure enable these unique CSH products to provide a combination of beneficial properties to paper products in a manner heretofore unknown by paper fillers. For example, the use of these products in paper can increase sheet bulk and Gurley porosity, simultaneously. In addition, these products are made up of large particles, but the products can still scatter light better than PCC, GCC, clay, or even calcined clay.

## DETAILED DESCRIPTION

In order to prepare my unique calcium silicate hydrates (CSH) products, it is first necessary to prepare a source of calcium. This is normally accomplished by the formation of a slurry of calcious material, most commonly lime. however, there are several different sources of calcium, which may be used. Some examples are  $\text{CaCO}_3$ ,  $\text{CaCl}_2$ , and hydrated lime. I have found it advantageous to employ pebble lime, if less than  $\frac{1}{2}$  inch dimension. First, the CaO was slaked in water. The amount and the rate of addition of lime were set and maintained in order to obtain a desired concentration of lime slurry. Because the slaking of lime is an exothermic process, it was necessary to control both the rate of addition of lime and the quantity of water used. When slaking, the best temperature was determined to be near boiling, i.e., close to  $100^\circ\text{C}$  ( $212^\circ\text{F}$ ) in order to form lime particles as fine as possible. Once the slaking was complete, the lime slurry was then screened through a 200 mesh screen to remove any grit and oversized particles. The screened and slaked lime slurry was tested for available lime (as CaO) and then transferred to an autoclave.

The chemistry of the slaking process can be given as follows:

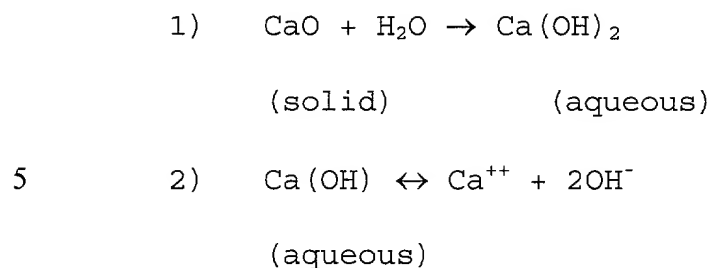

The solubility of calcium hydroxide slurry is inversely proportional to the temperature, as indicated in FIG. 7.


10 Next, it is necessary to prepare a slurry of siliceous material (i.e., a  $\text{SiO}_2$  slurry). Various siliceous materials such as quartz, water glass, clay, pure silica, natural silica (sand), diatomaceous earth, fluxed calcined diatomaceous earth, or any combination thereof may be

15 utilized as a source of siliceous material. I prefer to utilize an ultra fine grade of fluxed, calcined diatomaceous earth. This raw material was prepared into a slurry of ~1.55 lbs of solids per gallon water. The slurry was then preheated to near boiling, i.e., near 100 °C.

20 Importantly, the solubility of silica (unlike that of  $\text{Ca(OH)}_2$ ), is directly proportional to temperature, as seen in FIG. 8. For example, quartz (line A in FIG. 8) is only slightly soluble up to 100 °C. From 100 °C to 130 °C, it

starts solubilizing and around 270 °C, it reaches its maximum solubility of about 0.07%.

The dissolution of silica can be represented as follows:



The solubility of silica can be increased by raising the pH, and/or by using various additives (i.e. sodium hydroxide). In addition the rate of silica solubility is also a function of particle size, thus to enhance solubilization of the silica, I prefer to utilize ultra fine fluxed calcined diatomaceous earth.

Next, the siliceous slurry was mixed with the lime slurry in an autoclave, to achieve a hydrothermal reaction of the two slurries. Important, the amount of CaO in the lime slurry and the amount of SiO<sub>2</sub> in the fluxed calcined diatomaceous earth slurry were pre-selected to provide a predetermined CaO/SiO<sub>2</sub> mole ratio. Also, the concentration of the two slurries (CaO and SiO<sub>2</sub>) was selected so that the final concentration of the reaction mixture in the autoclave falls between about 0.2 pounds of solid per gallon of slurry to about 1.0 pounds of solid per gallon of slurry.

The hydrothermal reaction itself was carried out in a pressurized vessel, with three major steps:

1) Heating the slurry to the desired temperature (e.g. 180 °C to 300 °C)

5        2) Reacting at temperature for a specified time (e.g. 60 min to 240 min).


3) Stopping the reaction and cooling down

In my laboratory, the reaction autoclave was cooled by  
10 passing quenching water through an internal cooling coil, or by utilizing an external jacketed cooling system. I prefer to utilize a cool down process of from approximately 25 to 30 minutes to drop the temperature from about 230 °C to about 80 °C, as indicated in FIG. 9.

15        The process steps just mentioned are very important. This is because I have utilized the inverse solubilities of lime and silica with respect to temperature and time in an effort to produce the desired reaction composition, to arrive at the desired multi-phase calcium silicate hydrate  
20 product.

Without limiting my invention to any particular theory, I can postulate the following reaction during the hydro-thermal reaction between calcious material and

siliceous material. First, during the heating process, very few free  $\text{Ca}^{++}$  ions are available. After 100 °C, the silica starts going into a gel stage. Beyond 130 °C, the silica ions become available for reacting. As the temperature nears 180 °C, the calcium ion  $\text{Ca}^{++}$  reacts with the  $\text{Si}^+$  ion to form a metal silicate. The reaction can be written as follows:



Where:  $x=1$  to 6

$y=1$  to 6

The solid  $\text{Ca}(\text{OH})_2$  particles react with  $\text{SiO}_2$  in the gel phase to give a calcium silicate hydroxide whose crystallo-chemical structure can be written as  $\text{Ca}_6\text{Si}_6\text{O}_{17}(\text{OH})_2$  (Xonotlite). As the temperature is further raised from 180°C to 250 °C, calcium silicate hydride condenses with the remaining  $\text{Ca}(\text{OH})_2$  particles to give yet another calcium silicate hydroxide, this time with a distinct X-ray diffraction pattern and a crystallo-chemical formula of  $\text{CaO}_4(\text{SiO}_3)_3(\text{OH})_2$  (Foshagite).

Further, I have developed my hydrothermal reaction process so that more than one unique calcium silicate hydrate can be produced. In this respect, it is important to note that the following variables are critical in producing a desired end product:

- 1) Slaking Temperature
- 2) CaO/SiO<sub>2</sub> mole ratio
- 3) Slurry Concentration
- 4) Reaction Temperature
- 5) Reaction Time at Temperature

By changing these variables, a product having several different phases of calcium silicate hydroxide can be produced. Some of these phases may include:

X-ray Diffraction peaks			
<u>Formula</u>	<u>Morphology</u>	<u>Major</u>	<u>Minor</u>
Ca <sub>4</sub> (SiO <sub>3</sub> ) <sub>3</sub> (OH) <sub>2</sub>	Foshagite	d=2.93 Å, d=2.16 Å, d=4.96 Å	
Ca <sub>6</sub> Si <sub>6</sub> O <sub>17</sub>	Xonotlite	d=3.02 Å, d=2.04 Å , d=8.50 Å	
Ca <sub>5</sub> Si <sub>6</sub> O <sub>17</sub> (OH) <sub>2</sub>	Riversideite	d=3.055 Å, d=3.58 Å , d=2.80 Å	

Although not normally important, one should note that my final product CSH composition may also contain minor amounts of calcite - aragonite, produced as a result of side reactions.

5        The first and most important product of my process is a multi-phase CSH composition having various amounts of phases of matter represented by  $\text{CaO}_4(\text{SiO}_3)_3(\text{OH})_2$  (Foshagite) and  $\text{Ca}_6\text{Si}_6\text{O}_{17}(\text{OH})_2$  (Xonotlite). A unique X-ray diffraction pattern for this product is provided in FIG. 1. In that  
10    XRD, the crystallochemical formula of the mixture, and the characteristic d spacings, are given below:

(Phase I)        (Major)

Foshagite  $\text{CaO}_4(\text{SiO}_3)_3(\text{OH})_2$   $d=2.97\text{\AA}$ ,  $d=2.31\text{\AA}$ ,  $d=5.05\text{\AA}$

15        (Phase II)        (Minor)

Xonotlite  $\text{Ca}_6\text{Si}_6\text{O}_{17}(\text{OH})_2$   $d=3.107\text{\AA}$ ,  $d=1.75\text{\AA}$ ,  $d=3.66\text{\AA}$

The Scanning Electron Micrographs (SEMs) representing this first product are provided in FIG. 2 and 3. As shown  
20    in FIG. 2 and 3, it is important to note that the product consists of primary particles and secondary particles. The primary particles have a diameter between 0.1 and 0.2 microns and a length between 1.0 and 4.0 microns. FIG. 3

also indicates that the primary particle has two phases. The rod or ribbon like structure is characteristic of xonotlite ( $\text{Ca}_6\text{Si}_6\text{O}_{17}(\text{OH}_2)$ ) while the predominant structures are thin and fibrous, characteristic of foshagite  
5 ( $\text{Ca}_4(\text{SiO}_3)_3(\text{OH})_2$ ). The diameter of the foshagite crystals ranges from 0.1 to 0.3 microns and the length is ranges from 2.0 to 5.0 microns.

The SEM of FIG. 3 reveals a secondary, three dimensional structure. This three dimensional structure is  
10 believed to be formed by the interlocking of the fibrous material and the continuous growth of the "gel" like material at the intersection of the individual particles. This may also be the reason that the secondary structure is fairly stable. Importantly, the secondary structure can  
15 generally withstand the shear forces encountered during the discharge of material from pressure vessels after the reaction has completed, as well as shear forces encountered during papermaking. This is seen, for example, in that the secondary structure maintains its "bulk density" during  
20 some of the end use processes such as calendering during paper making. The particle size of secondary structure, as measured by particle size measuring devices like the Malvern Mastersizer, is in the range of 10-40 microns.

The calcium silicate hydroxide mixture of my invention also has very high brightness characteristics. A comparison with other pigments is given below:

Various pigments and their typical published  
5 brightness values are as follows:

Pigment	GE (TAPPI) Brightness (%)
Calcium Silicate Hydrate (TiSil Brand CSH)	95-97
Calcined (High Brightness) Clay	89-91
Filler Clay	85-88
Synthetic Silica	97-100
Calcium Carbonate	95 ± 1

One of the most significant characteristics of the composition of matter produced by my process is the ability of these multiple phase calcium silicates to absorb large  
10 amounts of water. These calcium silicates can adsorb anywhere from 350% to 1000% of their weight. This high water absorption capacity makes my pigment extremely well suited for preventing ink strike through in writing and printing papers, newsprint and more.

15

Example 1: Manufacture of multiple phase silicate hydrates

(5XPC 12)

Initially, 135.09 grams of 1/2" rotary pebble lime (Mississippi Lime Co.) was accurately weighed and slaked in 410 milliliters of de-ionized water. The slaking reaction is exothermic and caused the slurry temperature to rise to near boiling. When the slurry temperature was very near boiling and before much of the water had evaporated, an additional 1190 milliliters of water was added to both dilute and cool the slurry. The slurry was then agitated for 30 minutes to insure slaking completion before being screened through a 140 mesh screen. The slurry was then transferred to 5 liter autoclave and tested for lime availability in accordance with ASTM method C25. The autoclave is fitted with an outside heating element contained in an insulated jacket housing. The autoclave is also fitted with a variable speed magnetic drive for stirring the slurry during reaction. Approximately 109.6 grams of ultra fine fluxed calcined diatomaceous earth was weighed and added to 750ml of hot water (concentration of ~1.22lb/gallon). The silica slurry was heated for approximately 10min, to near boiling, then added to the screened and tested lime slurry. The exact amount of

silica slurry added to lime slurry was determined by the lime availability such that a mol ratio of 1.35 mol  $\text{CaO}/\text{SiO}_2$  would be maintained. The total slurry volume was also adjusted to a final concentration of 0.425 lb/gallon. The high pressure vessel was then closed, sealed, and connected to an automated heating/cooling control system (RX 330). The contents of the autoclave were under constant agitation via the magnetic drive motor mentioned above.

The high pressure reactor was heated by an externally jacketed heating element. The autoclave was continuously agitated at a constant speed of 338rpm. The reactor was heated for approximately 100 min in order to reach the target temperature of 245 °C (473 °F). The temperature was maintained at 245 °C for 2 hours, after heating to the target temperature was accomplished, with the use of the heating/cooling controller. At the end of the reaction, the "quenching" water was flushed through the cooling coil built inside the autoclave. This cooling process was maintained until the inside vessel temperature reached approximately 80 °C (approximately 30min). At which point, the vessel was opened and the reaction products were transferred to a holding vessel for storage. A portion of the resultant slurry was dried in a 105 °C oven for 12

hours. During the drying process, the slurry formed hard lumps, which had to be broken up through the use of a mortar and pestle. The now powdered, dry product was brushed through a 140 mesh screen to insure product

5 uniformity when testing. The pigment in this example was designated 5XPC 12. The test carried out on the dry powder were as follows:

- 1) X-ray diffraction analysis
- 10 2) Scanning Electron Micrograph (S.E.M.)
- 3) Brightness
- 4) Percent Water Absorption
- 5) Air Permeability (Blaine Method)
- 6) pH

15 For the air permeability test, two numbers are reported. The first is the weight in grams of powder required to fill the capsule and is an indication of the "bulk density" of the powder. The second is the time in  
20 seconds for a controlled volume of air to pass through the compressed powder inside the capsule and is an approximate measure of the "structure" of the particle.

The process conditions are given in Table 1a and the pigment properties are given in Table 1b.

Table 1a: Process conditions of 5XPC 12

Batch #	Mol Ratio (CaO/SiO <sub>2</sub> )	Concentr ation (lb/gall on)	Temperat ure (°C)	Average Pressure (psi)	Reaction Time (hours)
5XPC 12	1.35	0.425	245	456	2.0

5

Table 1b: Pigment Properties of 5XPC 12

Batch #	GE Brightness (% reflectanc e)	Water Absorption (%)	Air Permeabili ty Blaine Wt. (g)	Air Permeabili ty Blaine time (sec.)
5XPC 12	96.4	880	0.35	81.8

The x-ray diffraction pattern of this novel, multiphase calcium silicate hydrate is given in FIG. 1. This product ( identified as 5XPC 12) gave a unique x-ray pattern. The pattern indicated that the powder had one major phase and one minor phase. The summary of the characteristic "peaks" is shown in Table 1c.

The major peaks for phase I were found to indicate the presence of calcium silicate hydroxide - Foshagite -  $(Ca_4(SiO_3)_3(OH)_2)$  with major peaks at  $d(\text{\AA})=2.97$ ,  $d(\text{\AA})=2.31$  and a minor peak at  $d(\text{\AA})=5.05$ . For phase II, the x-ray diffraction pattern indicated the presence of calcium silicate hydrate - Xonotlite -  $(Ca_6Si_6O_{17}(OH)_2)$  with major peaks at  $d(\text{\AA})=3.107$ ,  $d(\text{\AA})=1.75$  and a minor peak at  $d(\text{\AA})=3.66$ . Thus I obtained a novel combination of Foshagite and Xonotlite from a single reaction.

Table 1c: X-ray diffraction peak summary for 5XPC 12

Common Name	Crystallochemical Formula	d-spacing (Major)	d-spacing (median)	d-spacing (Minor)
Foshagite (Phase I)	$CaO_4(SiO_3)_3(OH)_2$ (Major)	$d=2.97\text{\AA}$	$d=2.31\text{\AA}$	$d=5.05\text{\AA}$
Xonotlite (Phase II)	$Ca_6Si_6O_{17}(OH)_2$ (Minor)	$d=3.107\text{\AA}$	$d=1.75\text{\AA}$	$d=3.66\text{\AA}$

The S.E.M. pictures at 10,000 times and 2000 times magnification are given in FIG. 2 and 3, respectively. The high magnification S.E.M. clearly shows the fibrous structure of Foshagite and a small fraction of "rod" or "ribbon" like, tubular structures of Xonotlite.. The diameter of the Foshagite "fibers" ranges from 0.1 to 0.2 microns while the length ranges from 1 to 5 microns. The Xonotlite particles had diameters in the range of 0.1 to 0.3 microns and a length in the range of 1 to 3 microns.

The low magnification S.E.M. depicts the three dimensional structure of the secondary particles of calcium silicate hydrates. The structure appears to have been formed by an interlocking of the primary "fibrous" crystals and some inter-fiber bonding due to hydrogel of silica formed during the initial stages of hydro-thermal reaction. Because of these two main reasons, the secondary particles are fairly stable and do not significantly lose their 3-d structure when subjected to process shear. In addition, these particles also seem to withstand the pressure encountered during the calendering or finishing operations integral to papermaking. The median size of the secondary particles as seen, ranges from 10 to about 40 microns.

In order to evaluate this pigment in paper, handsheets were prepared for evaluation. Handsheets were prepared using the 5XPC 12 product sample in order to evaluate the papermaking characteristics of the pigment. The procedure

5 included preparation of a standard pulp slurry made up of 75% hardwood and 25% softwood. Both pulp sources were beaten separately, in a Valley Beater, to a specific Canadian Standard Freeness of  $450 \pm 10$  in accordance with TAPPI test methods T-200 and T-227. Handsheets were formed

10 from the prepared stock, on a 6" British handsheet mold, in accordance with TAPPI test method T-205. The exceptions to the standard method were as follows. Since the goal of producing these handsheets was to test filler performance, some filler was incorporated into the handsheets at various

15 replacement levels (usually 15%, 20%, and 25%). In order to achieve comparability between different levels, a constant basis weight was achieved via a reduction in fiber content. Thus, a 25% filled sheet would contain only 75% of the fiber that the unfilled sheet had. The next

20 variation on the standard test method was the addition of retention aid. A retention aid (Percol 175) was added to hold the filler in the sheet until the sheet had dried

completely. All other handsheet formation components were kept consistent with TAPPI test method T-205.

The handsheets were tested in accordance with TAPPI test method T-220, with one exception. Instead of using a  
5 15mm sample for testing tensile, a 25.4mm sample was used and the tensile index calculations were altered accordingly. The handsheets were ashed in accordance with TAPPI test method T-211.

Paper handsheets were tested for the following  
10 properties:

1. Opacity
2. Sheet Scattering Coefficient
3. Filler Scattering Coefficient
4. Brightness
- 15 5. Sheet Bulk (Basis Weight/Caliper ratio)
6. Sheet Stiffness
7. Sheet Porosity
8. Sheet Smoothness
9. Sheet Tensile Index

20 A standard alkaline filler, precipitated calcium carbonate (SMI Albacar HO), was used as a reference material to gauge product performance. The results of the handsheet evaluation are given in Tables 1d and 1e.

Table 1d: Optical property performance of handsheets containing 20% (interpolated) 5XPC 12 and pulp only.

Pigment	Brightness (ISO)	Opacity (ISO)	Sheet Scattering Coefficient t (cm <sup>2</sup> /g)	Filler Scattering Coefficient t (cm <sup>2</sup> /g)
5XPC 12	90.56	90.88	835.21	3077.24
Pulp Only	85.73	73.19	274.8	NM
Improvement over pulp	+ 5.6%	+ 24.2%	+ 203.9%	-

5 Table 1e: Strength property performance of handsheets containing 20% (interpolated) 5XPC 12 and pulp only.

Pigment	Stiffness (Gurley Units)	Bulk (cm <sup>3</sup> /g)	Porosity (sec/100cc air)
5XPC 12	150.74	1.73	64.91
Pulp Only	137.15	1.40	51.94
Improvement over pulp	+ 9.9%	+ 23.3%	+ 25.0%

Table 1f: Optical property performance of handsheets containing 20% (interpolated) 5XPC 12 and 20% (interpolated) PCC.

Pigment	Brightness (ISO)	Opacity (ISO)	Sheet Scattering Coefficient (cm <sup>2</sup> /g)	Filler Scattering Coefficient (cm <sup>2</sup> /g)
5XPC 12	90.56	90.88	835.12	3077.24
PCC	90.44	88.69	709.84	2474.48
Improvement over PCC	Even	+ 2.47%	+ 17.66%	+ 24.36%

5 Table 1g: Strength property performance of handsheets containing 20% (interpolated) of 5XPC 12 and 20% (interpolated) PCC.

Pigment	Bulk (cm <sup>3</sup> /g)	Porosity (sec/100cc air)	Stiffness (Gurley Units)	Tensile Index (Nm/g)
5XPC 12	1.73	64.91	150.74	31.17
PCC	1.55	22.24	107.54	27.95
Improvement over PCC	+ 11.56%	+ 191.9%	+ 40.17%	+ 11.53%

Example 2 - (5XPC - 27 pigment sample)

This novel, multiphase calcium silicate hydrate was formed by hydro-thermal reaction of lime and silica. The  
5 CaO/SiO<sub>2</sub> mol ratio used for this new product was 0.85, the final slurry concentration was ~0.8 lb/gallon, the reaction temperature was 190 °C, and the reaction time was 2.5 hours. A summary of these conditions is given in Table 2a.

A totally new product was formed using a new set of  
10 reaction conditions. First, the CaO/SiO<sub>2</sub> mol ratio was adjusted to 0.85, the reaction temperature was set to 190 °C, the slurry concentration was increased to 0.75 lbs/gallon, and the reaction time was increased to 2.5 hours. The product of this example was designated 5XPC 27.  
15 A summary of the reaction conditions is given in Table 2a.

Table 2a: Process conditions of 5XPC 27

Batch #	Mol Ratio (CaO/SiO <sub>2</sub> )	Concentr ation (lb/gall on)	Temperat ure (°C)	Average Pressure (psi)	Reaction Time (hours)
5XPC 27	0.85	0.75	190	163.5	2.5

The resulting calcium silicate hydrate was tested for pigment brightness, water absorption, Blaine air permeability and density, and pH. Both X-ray diffraction and Scanning Electron Micrograph analyses were also

5 performed on this product. The pigment properties are given in Table 2b. The pigment was evaluated for its performance in paper by incorporating it into handsheets as in example 1. The results of the handsheet work are given in Tables 2d and 2e. The X-ray diffraction pattern is

10 given in FIG. 4. The S.E.M. pictures at 10,000 and 2000 times magnification are given in FIG. 5 and 6, respectively.

The calcium silicate hydride formed under these conditions had substantially lower brightness and water

15 absorption characteristics than TiSil Brand CSH set forth in Example 1. However, it gave much higher sheet bulk and sheet permeability characteristics. The pigment properties of my novel 5XPC 27 pigment are given in Table 2b. It appears that this product provided a much higher sheet

20 bulk. Also, the sheet permeability of this new product was higher than the Foshagite-Xonotlite complex as described in Example 1.

Table 2b: Pigment Properties of 5XPC 27

Batch #	G.E. Brightness (% reflectance)	Water Absorption (%)	Air Permeability Blaine Wt. (g)	Air Permeability Blaine time (sec.)
5XPC 27	91.2	360	0.5	17.0

As the mole ratio of CaO/SiO<sub>2</sub> was reduced to ~0.85 and the reaction temperature was lowered to 190 °C, I discovered another unique and useful multiple phase calcium silicate hydrate material with a distinct and unique X-ray diffraction pattern. The X-ray diffraction analysis revealed this product to be a mixture of Riversidite [Ca<sub>5</sub>Si<sub>6</sub>O<sub>16</sub>(OH)<sub>2</sub>] and Xonotlite [Ca<sub>6</sub>Si<sub>6</sub>O<sub>17</sub>(OH)<sub>2</sub>]. The X-ray diffraction pattern is given in Fig. 4. The pattern indicated that the powder had one major phase and one minor phase. The peak summary is shown in Table 2c.

Table 2c: X-ray diffraction peak summary for 5XPC 27

Common Name	Crystallochemical Formula	d-spacing (Major)	d-spacing (Median)	d-spacing (Minor)
Riversideite (Phase I)	$\text{Ca}_5\text{Si}_6\text{O}_{16}(\text{OH})_2$ (Major)	$d=3.055\text{\AA}$	$d=3.58\text{\AA}$	$d=2.80\text{\AA}$
Xonotlite (Phase II)	$\text{Ca}_6\text{Si}_6\text{O}_{17}(\text{OH})_2$ (Minor)	$d=3.056\text{\AA}$	$d=4.09\text{\AA}$	$d=2.50\text{\AA}$

The major peaks for phase I were found to indicate the presence of calcium silicate hydrate - Riversideite -

5  $(\text{Ca}_5\text{Si}_6\text{O}_{16}(\text{OH})_2)$  with major peaks at  $d(\text{\AA})= 3.055$ ,  $d(\text{\AA})= 3.58$  and a minor peak at  $d(\text{\AA})= 2.80$ . For phase II, the pattern indicated the presence of calcium silicate hydroxide - Xonotlite -  $(\text{Ca}_6\text{Si}_6\text{O}_{17}(\text{OH})_2)$  with major peaks at  $d(\text{\AA})= 3.056$ ,  $d(\text{\AA})= 4.09$  and a minor peak at  $d(\text{\AA})= 2.50$ . The pigment  
10 also contained trace amounts of calcite ( $\text{CaCO}_3$ ). The other portion of the slurry was tested for the pigment performance as a filler in paper. The paper was formed into handsheets and tested using the procedures described in example 1.

15 The S.E.M. pictures at 10,000 times and 2000 times are given in Figs. 5 and 6. As can be seen in the 10,000x magnification photograph, the product is unlike the previous example. The calcium silicate hydrate mixture has fibrous and non-fibrous composition joined possibly by an

amorphous portion of silica hydrogel formed during the initial phase of hydro-thermal reaction.

The 2000x magnification indicates the formation of an irregular globular particle formed by the fibrous inter-  
5 growth of a series of primary fibrous crystals. The particle size is in the range of 10-30 microns and the crystals seem to have grown randomly.

This multi-phase (primarily Riversideite and Xonotlite) calcium silicate hydrate gave lower brightness  
10 value than that of Example 1. More significantly, this material gave a much lower water absorption (around 360% - 400%) as well.

To evaluate performance in paper, handsheets were formed using this pigment and then tested as in Example 1.  
15 The paper performance results are shown in Tables 2d-g.

This product, compared to pulp only, gave substantially higher stiffness and sheet bulk. Unlike the pigment provided in Example 1, (where Foshagite was the primary component), this second pigment (where Riversideite  
20 and Xonotlite are present) combination produced a much more open sheet, as shown by the low Gurley porosity numbers. The optical properties, like brightness, opacity and scattering coefficient of the sheet decreased.

Comparing the performance of this second pigment (with predominantly Riversidite and Xonotlite present) with an alkaline filler, such as precipitated calcium carbonate, the sheet stiffness and bulk improved dramatically. The optical properties (sheet opacity, sheet brightness, etc.) of the handsheets decreased, however. The decreased optical properties of this new multiphase product, were clearly due to the large particle size and irregular globular structure as seen in the S.E.M. pictures.

Table 2d: Optical property performance of handsheets containing 20% (interpolated) 5XPC 27 and pulp only.

Pigment	Brightness (ISO)	Opacity (ISO)	Sheet Scattering Coefficient (cm <sup>2</sup> /g)	Filler Scattering Coefficient (cm <sup>2</sup> /g)
5XPC 27	87.86	83.35	449.12	1092.42
Pulp Only	85.19	74.97	292.1	N/A
Improvement over pulp	+ 3.1%	+ 11.2%	+ 53.8%	-

Table 2e: Strength property performance of handsheets containing 20% (interpolated) 5XPC 27 and pulp only.

Pigment	Stiffness (Gurley Units)	Bulk (cm <sup>3</sup> /g)	Porosity (sec/100cc air)
5XPC 27	225.87	2.46	3.92
Pulp Only	136.68	1.47	33.5
Improvement over pulp	+ 65.2%	+ 68.0%	- 88.3%

5 Table 2f: Optical property performance of handsheets containing 20% (interpolated) 5XPC 27 and 20% (interpolated) PCC.

Pigment	Brightness (ISO)	Opacity (ISO)	Sheet Scattering Coefficient t (cm <sup>2</sup> /g)	Filler Scattering Coefficient t (cm <sup>2</sup> /g)
5XPC 27	87.86	83.35	449.12	1092.42
PCC	90.21	89.39	738.55	2546.03
Improvement over PCC	- 2.6%	- 6.76%	- 39.19%	- 57.09%

Table 2g: Strength property performance of handsheets containing 20% (interpolated) of 5XPC 27 and 20% (interpolated) PCC.

Pigment	Stiffness (Gurley Units)	Bulk (cm <sup>3</sup> /g)	Porosity (sec/100cc air)	Tensile Index (Nm/g)
5XPC 27	225.87	2.46	3.92	29.67
PCC	102.11	1.65	13.23	24.77
Improvement over PCC	+ 121.19%	+ 49.22%	- 70.39%	+ 19.79%

5 Thus, this multiphase combination of calcium silicate hydrate was most useful in improving sheet stiffness and sheet bulk. It was also excellent for "opening up" the sheet (lowering the Gurley porosity) for more "breathing." Due to its excellent stiffness, I refer to this product as

10 "StiSil Brand CSH."

### Example 3: Varying Reaction Temperature (XPC 119)

Initially, 39.9 grams of pebble lime was weighed accurately and added slowly to 1.2L of water in a beaker

15 with constant agitation. The amount of lime , water, and the rate of lime addition were controlled in an effort to

keep the slurry from boiling due to the exothermic nature of the lime slaking reaction. The slaked lime of  $\text{Ca}(\text{OH})_2$  was screened in a 200 mesh screen. The residual material was then discarded. The filtered  $\text{Ca}(\text{OH})_2$  slurry was tested

5 by acidic titration to calculate the exact amount of available lime. The slaked lime was then transferred into a 2 liter autoclave. Then, 31.06 grams of ultrafine, calcined diatomaceous earth was added to 200 ml of water in order to produce a slurry of 0.1553 g/L concentration.

10 This slurry was also preheated with constant stirring and brought to near boiling (near 100 °C). Next, the silica was added to the autoclave containing the hot slaked lime slurry. The total solids concentration of the  $\text{CaO} + \text{SiO}_2$  slurry inside the autoclave, at this point was ~0.5

15 lbs/gallon. The mol ratio of lime to silica was 1.67  $\text{CaO}/\text{SiO}_2$ . The high-pressure reactor was sealed and then heated by an externally, jacketed, electrical heating element.

The autoclave was simultaneously agitated at a

20 constant speed magnetic drive motor at 600 RPM. The autoclave was heated until a preset temperature of 220 °C was reached. At that point the reaction conditions were held constant by a system controller, RX-32. The  $\text{CaO} + \text{SiO}_2$

slurry was reacted at a temperature of 220 °C for 120 minutes. At the end of this time, the "quenching" water was passed through a cooling system built into the inside of the autoclave. Inside the pressure vessel, steam  
5 condensed and the temperature fell rapidly. The cooling water continued until the vessel reached approximately 80 °C.

The silicate slurry was transferred into a holding beaker. The following describes the overall heating /  
10 cooling cycle (see Fig. 5):

- Time to temperature ~ 100 min
- Time at temperature ~ 120 min
- Time for cooling ~ 25 min

15 A portion of the slurry was tested for the following properties:

- 1) X-Ray Diffraction Analysis
- 2) Scanning Electron Microscope (S.E.M)
- 3) Brightness
- 20 4) Water Absorption
- 5) Blaine Air Permeability (ASTM/ASTM C204-78a)
  - Sample Weight (g) - Indication of Bulk Density

- Time (in sec) for a fixed volume of air to pass through the volume of sample - Indication of particle packing or structure

5        The reaction conditions and pigment properties are given in Tables 3a and 3b respectively.

Example 4: Varying Reaction Temperature (XPC 107)

10        In this example, all the reaction conditions and parameters were identical to example 3 above, except for the reaction temperature was raised from 220 °C to 233 °C. The resultant calcium silicate hydrate complex was then tested as per the above-described test program and the resultant reaction conditions and pigment properties are  
15        given in Tables 3a and 3b respectively.

Example 5: Varying Reaction Temperature (XPC 124)

20        In this example, all of the reaction conditions and parameters were kept constant, as in example 3, except for reaction temperature. The reaction temperature was raised from 233 °C to 243 °C. The calcium silicate hydrate complex formed was tested as in the above examples. The reaction

conditions and pigment properties are given in Tables 3a and 3b respectively.

Table 3a: Reaction conditions for Examples 3, 4, and 5.

Example #	Batch ID	Mole Ratio (CaO/SiO <sub>2</sub> )	Conc. (lbs/gal)	Temp (degrees C)	Reaction Time (hours)
Example 3	XPC 119	1.67	0.7	220.0	2
Example 4	XPC 107	1.67	0.7	233.0	2
Example 5	XPC 124	1.67	0.7	243.0	2

5

Table 3b: Pigment properties for Examples 3, 4, and 5.

Example #	Water Absorption (%)	Brightness (ISO)	Blaine Wt. (grams)	Blaine Time (sec.)	pH
Example 3	440	94.2	0.5	94	11.6
Example 4	440	96.2	0.45	118.5	10.7
Example 5	580	94.9	0.35	94.9	11.5

Note that the mid range reaction temperature of 233 °C produced the highest brightness material

10

#### Example 6: Varying the CaO/SiO<sub>2</sub> mol ratio (XPC 130)

In this example, all the reaction parameters were kept constant, as in example 4, except for the CaO/SiO<sub>2</sub> mol ratio. The CaO/SiO<sub>2</sub> mol ratio was changed to 1.4.

15

Then, 69.0g of SiO<sub>2</sub> and 78.0g of CaO were mixed to give a CaO/SiO<sub>2</sub> mol ratio of 1.4. The two slurries, CaO and SiO<sub>2</sub> were mixed in the autoclave. The concentration in the

autoclave was adjusted by adding water to 0.7 lb/gal. The reaction was carried out for two hours and the autoclave was cooled and the product was handled as in example 1.

The reaction temperature was kept constant at 233 °C. The

5 reaction mixture was agitated at a constant speed via a magnetic drive motor attached to the autoclave. The motor was rotated at 600 RPM. The final product was tested for key parameters and the reaction conditions and key pigment properties are shown in Tables 4a and 4b respectively.

10

Example 7: Varying the CaO/SiO<sub>2</sub> mol ratio (XPC 132)

In this example, all the reaction parameters were kept constant as in example 4, except the CaO/SiO<sub>2</sub> mol ratio was raised to 1.6. The hydrothermal reaction was carried out  
15 using the same cycle of heating and cooling as in the previous examples and the final product was again tested for key pigment properties. The reaction conditions and key pigment properties are shown in Tables 4a and 4b respectively.

20

Example 8: Varying CaO/SiO<sub>2</sub> mol ratio (XPC 134)

Here again, the reaction parameters were all held constant, as in example 4, except for the CaO/SiO<sub>2</sub> mol

ratio, which was raised to 1.8. The hydrothermal reaction was carried out using the same cycle of heating and cooling as in the previous examples and the final product was again tested for key pigment properties. The reaction conditions and key pigment properties are shown in Tables 4a and 4b respectively.

Table 4a: Reaction conditions for Examples 6, 7, and 8.

Example #	Batch #	Mole Ratio (CaO/SiO <sub>2</sub> )	Conc. (lbs/gal)	Temp. (degrees C)	Reaction Time (hours)
Example 6	XPC 130	1.4	0.7	233.0	2
Example 7	XPC 132	1.6	0.7	233.0	2
Example 8	XPC 134	1.8	0.7	233.0	2

Table 4b: Pigment properties for Examples 6, 7, 8.

Example #	Water Absorption (%)	Brightness (ISO)	Blaine Wt. (grams)	Blaine Time (sec.)	pH
Example 6	380	94.7	0.45	112	10.9
Example 7	420	94.1	0.45	51.9	11.4
Example 8	400	94.7	0.5	57.8	11.7

Note that a CaO/SiO<sub>2</sub> mole ratio of 1.6 produced a calcium silicate hydrate with the highest water absorption capability.

Example 9: Varying Reaction Time (XPC 172)

In this example, all the process conditions were kept constant, as in example 7, except for the reaction time, which was lowered to 1 hour. The calcium silicate hydrate complex was tested as in the previous examples and the reaction conditions and key pigment properties are shown in Tables 5a and 5b respectively.

Example 10: Varying Reaction Time (XPC 173)

In this example, all the process conditions were kept constant, as in example 9, except for the reaction time, which was raised to 2 hours. The calcium silicate hydrate complex was tested as in the previous examples and the reaction conditions and key pigment properties are shown in Tables 5a and 5b respectively.

Example 11: Varying Reaction Time (XPC174)

In this example, all the process conditions were kept constant, as in example 9, except for the reaction time, which was raised to 3 hours. The calcium silicate hydrate complex was tested as in the previous examples and the reaction conditions and key pigment properties are shown in Tables 5a and 5b respectively.

Table 5a: Reaction conditions for Examples 9, 10, and 11.

Example #	Batch #	Mole Ratio (CaO/SiO <sub>2</sub> )	Conc. (lbs/gal)	Temp. (degrees C)	Reaction Time (hours)
Example 9	XPC 172	1.67	0.7	233.0	1
Example 10	XPC 173	1.67	0.7	233.0	2
Example 11	XPC 174	1.67	0.7	233.0	3

Table 5b: Pigment properties for Examples 9, 10 and 11.

Example #	Water Absorption (%)	Brightness (ISO)	Blaine Wt. (grams)	Blaine Time (sec.)	PH
Example 9	480	92.9	0.5	74	11.1
Example 10	520	96.1	0.45	108.5	11.0
Example 11	600	93.3	0.4	135.0	11.2

Note that a reaction time of 2 hours produced the highest brightness product. The longer reaction time of 3 hours produced the greatest water absorption values, but at a lower brightness.

#### Example 12: Varying CaO-SiO<sub>2</sub> Slurry Concentration (XPC 136)

In this example, all the reaction conditions were kept constant, as in Example 7, except for the CaO/SiO<sub>2</sub> slurry concentration, which was lowered to 0.4 lb/gallon. To start, 49.6 g of lime was slaked, screened, and titrated

for available CaO. Then, 34.2g of ultra-fine fluxed calcined diatomaceous earth was slurried. The fluxed calcined diatomaceous earth slurry was added to the lime slurry to give the mixture an initial CaO/SiO<sub>2</sub> mol ratio of 1.6. The reactants were then placed in a 2.0 liter autoclave and water was added to bring the final concentration of CaO+SiO<sub>2</sub> slurry up to 0.4 lb/gallon. The reaction temperature was set at 233 °C. The autoclave was set and controlled using a temperature controller for both heating and cooling cycles as shown in Fig. 9. The silica-lime slurry was reacted at 233 °C for two hours. At the end of the reaction, the resulting calcium silicate hydrate was cooled by circulating water through the jacketed autoclave. The resulting mass was transferred to a holding beaker. The product was tested for the same key parameters and with the same methods as described in example 3. The reaction conditions and key pigment properties are shown in Tables 6a and 6b, respectively.

20 Example 13 Varying CaO - SiO<sub>2</sub> Slurry Concentration (XPC 138)

In this reaction, all the reaction parameters were kept constant, as in example 12, except for the CaO + SiO<sub>2</sub> slurry concentration, which was raised to 0.6 lb/gallon.

The product was tested as in Example 3 and the reaction conditions and key pigment properties are shown in Tables 6a and 6b, respectively.

5 Example 14 Varying CaO - SiO<sub>2</sub> Slurry Concentration (XPC 140)

In this reaction, all the reaction parameters were kept constant, as in example 12, except for the CaO + SiO<sub>2</sub> slurry concentration, which was raised to 0.8 lb/gallon.

10 The product was tested as in example 3 and the reaction conditions and key pigment properties are shown in Tables 6a and 6b, respectively.

Example 15 Varying CaO - SiO<sub>2</sub> Slurry Concentration (XPC 141)

15 In this reaction, all the reaction parameters were kept constant, as in example 12, except for the CaO/SiO<sub>2</sub> slurry concentration, which was raised to 0.9 lb/gallon.

The product was tested as in example 3 and the reaction conditions and key pigment properties are shown in Tables 6a and 6b, respectively.

Table 6a: Reaction conditions for Examples 12, 13, 14, 15.

Example #	Batch #	Mole Ratio (CaO/SiO <sub>2</sub> )	Conc. (lbs/gal)	Temp. (degrees C)	Reaction Time (hours)
Example 12	XPC 136	1.6	0.4	233	2
Example 13	XPC 138	1.6	0.6	233	2
Example 14	XPC 140	1.6	0.8	233	2
Example 15	XPC 141	1.6	0.9	233	2

Table 6b: Pigment properties for Examples 12, 13, 14, 15.

Example #	Water Absorption (%)	Brightness (ISO)	Blaine Wt. (grams)	Blaine Time (sec.)	pH
Example 12	480	93.9	0.45	93.7	11.4
Example 13	460	94.6	0.50	173.0	10.4
Example 14	560	96.7	0.35	75.1	10.7
Example 15	420	94.2	0.45	45.7	11.6

Note that the slurry concentration of 0.8 lb/gallon produced the highest brightness and the lowest bulk density.

#### 10 Example 16 (5XPC 52)

In this example, the same procedures described in example 1 were used, except that the siliceous raw material

was changed. Instead of using diatomaceous earth, a source of 100% pure silica was used (trade name: Min-U-Sil). The reaction was carried out at a very low CaO - SiO<sub>2</sub> slurry concentration of 0.2 lb/gallon. The resultant calcium silicate hydrate complex was tested for the same key pigment properties as in example 1 above. The reaction conditions and key pigment properties are given in Tables 7a and 7b, respectively.

10 Example 17 (5XPC 55)

In this example, the same procedures described in example 16 were used (including using the pure silica for a siliceous source). The only difference here was that the CaO - SiO<sub>2</sub> slurry concentration was raised to 0.4 lb/gallon, and the temperature was kept at 232 °C. The calcium silicate hydrate complex formed from this reaction was tested as in example 16 above. The reaction conditions and key pigment properties are given in Tables 7a and 7b.

Table 7a: Reaction conditions for Examples 16 and 17.

Batch #	Mol Ratio (CaO/SiO <sub>2</sub> )	Conc. (lb/gallon)	Temp. (°C)	Average Pressure (psi)	Reaction Time (hours)
5XPC 52	1.31	.25	245	490	2
5XPC 55	1.31	.4	232	387	2

Table 7b: Pigment Properties Examples 16 and 17

Batch #	G.E. Brightness (%reflectance)	Water Absorption (%)	Air Perm. Blaine Wt. (g)	Air Perm. Blaine time (sec.)
5XPC 52	96.2	920		
5XPC 55	95.1	840		

5

#### Example 18 Sodium Silicate (5XPC 57)

In this example, all the reaction procedures were kept constant as in example 1. The only difference was the addition of a different siliceous raw material source. Here, 20 parts of the fluxed calcined diatomaceous earth were replaced by liquid sodium silica Na<sub>2</sub>O - SiO<sub>2</sub> ratio of 1:3 (P.Q. "N" product). The overall CaO/SiO<sub>2</sub> mol ratio was

kept at 1.31, the concentration of the CaO - SiO<sub>2</sub> slurry was kept at 0.5 lb/gallon, and all the other reaction conditions were kept the same as well. This product was also tested according to the procedures in example 1. The reaction conditions and key pigment properties are given in Tables 8a and 8b, respectively.

Table 8a: Reaction conditions for Examples 18.

Batch #	Mol Ratio (CaO/SiO <sub>2</sub> )	Concentration (lb/gallon)	Temperature (°C)	Average Pressure (psi)	Reaction Time (hours)
5XPC 57	1.31	0.5	245	375	2

Table 8b: Pigment Properties Examples 18.

Batch #	GE Brightness (% reflectance)	Water Absorption (%)	Air Permeability Blaine Wt. (g)	Air Permeability Blaine time (sec.)
5XPC 57	97.0	680	0.35	57.5

Note that the most significant difference between this product and the previous example is the high brightness values produced.

5 Example 19 (TiSil Brand CSH vs. PCC)

Application of multi phase calcium silicate hydrate complex comprising predominantly Foshagite,  $\text{Ca}_4(\text{SiO}_3)_3(\text{OH})_2$  and some Xonotlite,  $\text{Ca}_6\text{Si}_6\text{O}_{17}(\text{OH})_2$  in paper according to the following process conditions. My novel calcium silicate hydrate complex, referred to as TiSil Brand CSH, was applied in paper handsheets. It was compared to commercial PCC (SMI's Albacar(HO)) and a mixture of PCC and approximately 60 lbs. per ton  $\text{TiO}_2$ . The results of the testing are given in Table 9a and 9b. The graphs showing the performance of TiSil compared to PCC are given in Figures 6 through 13. Improvement by TiSil over PCC is given in Tables 9c. TiSil Brand CSH gave the following improvement at 20% ash and equal brightness:

Table 9a: Optical property performance of handsheets containing 20% (interpolated) TiSil and 20% (interpolated) PCC.

Pigment	Brightness (ISO)	Opacity (ISO)	Sheet Scattering Coefficient (cm <sup>2</sup> /g)	Filler Scattering Coefficient (cm <sup>2</sup> /g)
TiSil	87.2	92.3	858.0	3065.1
PCC	90.0	89.0	716.8	2507.0

Table 9b: Strength property performance of handsheets containing 20% (interpolated) of TiSil and 20% (interpolated) PCC.

Pigment	Stiffness (Gurley Units)	Bulk (cm <sup>3</sup> /g)	Porosity (sec/100cc air)	Tensile Index (Nm/g)
TiSil	135.3	1.78	47.5	30.0
PCC	113.4	1.58	26.0	29.0

Table 9c: Handsheet results for TiSil vs. PCC

Opacity_____	+ 2.13%
Scattering Power of sheet_____	+ 16.2%
Filler Scattering Coefficient_____	+ 24%
Bulk_____	+ 9%
Porosity_____	+ 220%
Stiffness_____	+ 38.0%
Tensile Strength Index_____	+ 22.0%

The TiSil brand CSH pigment seemed to improve a combination of properties, which were heretofore unattainable. For example, if sheet bulk was improved, sheet porosity would usually drop. In addition, if sheet bulk was obtained by having a larger particle size, optical properties would be significantly reduced. With my novel

pigment, it is the unique composition and structure of the pigment that allows improvement in key paper properties like higher bulk and lower porosity.

5 Example 20 (TiSil Brand CSH vs. PCC with 60 lb/ton  $\text{TiO}_2$ )

In this example, the calcium silicate hydrate from example 1 (5XPC12) was compared with a mixture of SMI's Albacar(HO) containing 60lb/ton  $\text{TiO}_2$ . The results of the paper testing are placed in Tables 10a and 10b. The

10 graphical representations of the data are given in Figures 18 through 25. The improvement TiSil gave over the PCC +  $\text{TiO}_2$  mixture (@ 20% ash level and equal brightness) is given in Table 10c.

15 Table 10a: Optical property performance of handsheets containing 20% (interpolated) TiSil and 20% (interpolated) PCC +  $\text{TiO}_2$  combination.

Pigment	Brightness (ISO)	Opacity (ISO)	Sheet Scattering Coefficient (cm <sup>2</sup> /g)	Filler Scattering Coefficient (cm <sup>2</sup> /g)
TiSil	87.2	92.3	858.0	3065.1
PCC with $\text{TiO}_2$	90.0	89.0	716.8	2507.0

Table 10b: Strength property performance of handsheets containing 20% (interpolated) of TiSil and 20% (interpolated) PCC + TiO<sub>2</sub> combination.

Pigment	Stiffness (Gurley Units)	Bulk (cm <sup>3</sup> /g)	Porosity (sec/100cc air)	Tensile Index (Nm/g)
TiSil	135.3	1.78	47.5	30.0
PCC with TiO <sub>2</sub>	113.4	1.58	26.0	29.0

Table 10c: Handsheet results - TiSil vs. PCC + TiO<sub>2</sub> combination

Opacity_____	by 0.5%
Scattering Power of sheet_____	by 3.0%
Filler Scattering Coefficient_____	by 4.0%
Bulk_____	by 8.2%
Porosity_____	by 40.0%
Stiffness_____	by 26.0%
Tensile_____	by 221.0%

Here, TiSil Brand CSH has demonstrated exceptional scattering power for light, an unusual ability to close up the sheet (higher Gurley porosity) and a significant improvement in sheet bulk, stiffness, and tensile index.

#### Example 21 (TiSil Brand CSH vs. Bulkite - XPC65)

In this example, the pigment of my invention, namely a calcium silicate hydrate complex (Foshagite - Xonotlite complex) was manufactured under the conditions given in Table 11a. The pigment was tested for brightness, water

absorption, Blaine, and pH. The results are given in Table 11b. This product was compared as a paper-making pigment with commercially available calcium silicate, (Trade name Bulkite). The graphical representation of the results are given in Figures 26-30. The comparison of the two pigments, XPC-65 and Bulkite at 20% ash is given in Table 11c. The improvement over Bulkite at 20% ash (interpolated) is given in Table 11d.

Table 11a: Reaction conditions for Example 21.

Example #	Batch #	Mol Ratio (CaO/SiO <sub>2</sub> )	Concentration (lb/gallon)	Temperature (°C)	Reaction Time (hours)
Example 21	XPC 65	1.67	0.71	232	2

Table 11b: Pigment properties for Example 21.

Example #	Water Absorption (%)	Brightness (ISO)	Blaine Wt. (grams)	Blaine Time (sec.)	PH
Example 21	420	93.7	0.45	46.2	10.7

Table 11c: Optical property performance of handsheets containing 20% (interpolated) XPC 65 and Bulkite.

Pigment	Opacity (ISO)	Sheet Scattering Coefficient (cm <sup>2</sup> /g)	Filler Scat. Coeff. (cm <sup>2</sup> /g)	Brightness (ISO)	Porosity (sec/100 cc air)
XPC - 65	90.9	845.4	3109.6	90.0	42.4
Bulkite	84.2	460.9	1273.4	86.4	4.9

5

Table 11d: Summary of TiSil Improvement over Bulkite

Opacity_____	by 7.2%
Scattering Power of sheet_____	by 83.0%
Filler Scattering Coefficient_____	by 144.0%
Brightness_____	by 4.13%
Porosity_____	by 770.0%

10

Once again, this product shows substantially significant improvement over industry standard pigments.

#### Example 22 (XPC 117) Application in Newsprint

In this example, the multi-phase CSH Foshagite -  
 15 Xonotlite was made by the same procedure as in Example 1,  
 using the process conditions in Table 12a below.

20

25

Table 12a: Reaction conditions for Example 22.

Example #	Batch #	Mol Ratio (CaO/SiO <sub>2</sub> )	Concentration (lb/gallon)	Temperature (°C)	Reaction Time (hours)
Example 22	XPC 117	1.67	0.67	224	2

The product was tested for brightness, water absorption, Blaine and pH. The results are given in Table 12b.

Table 12b: Pigment properties for Example 22.

Example #	Water Absorption (%)	Brightness (ISO)	Blaine Wt. (grams)	Blaine Time (sec.)	pH
Example 22	470	95.3	0.45	184.7	10.6

The calcium silicate hydrate complex of this invention was added to newsprint furnish (20% kraft, 80% TMP). To compare the performance of the product of my invention, handsheets were made using commercially available calcium silicate (Hubersil, JM Huber Co.) and a precipitated calcium carbonate (also by JM Huber Co). The newsprint

sheets containing these pigments were tested for the following:

Sheet bulk, stiffness, porosity, smoothness, brightness, opacity and several print quality parameters like ink strike through, show through and overall print through. Sheets were also tested for the static coefficient of friction.

The actual values, interpolated to 6% ash, are given in Tables 12c and 12d. A comparison of the product of my invention and Huber's PCC and HuberSil gave the differences shown in Tables 12e and 12f. The corresponding bar graphs at 6.0% interpolated ash are given in FIGS. 31 through 39.

Table 12c: Optical property performance of handsheets containing 6% (interpolated) TiSil, HuberSil, and Huber Carbonate.

Pigment	Normalized Opacity (ISO)	Ink Penetration	Show Through	Print Through
TiSil	86.29	1.46	4.67	6.13
HuberSil	85.33	1.60	5.14	6.74
Huber Carbonate	86.75	2.46	4.79	7.24

Table 12d: Strength property performance of handsheets containing 6% (interpolated) TiSil, HuberSil, and Huber Carbonate.

Pigment	Porosity (sec/100 cc air)	Tensile Index (Nm/g)	Stiffness (Gurley Units)	Static Coeff. of Friction	Sheet Smoothness (Sheffield Units)
TiSil	15.40	25.57	22.08	0.90	159.76
HuberSil	11.93	21.95	24.31	0.90	176.02
Huber Carbonate	11.36	25.32	18.06	0.86	164.06

5

Table 12e: Summary of Improvement over Huber Carbonate

Opacity_____	-0.53%
Ink Penetration_____	40% less (better)
Show through_____	2.0% less (better)
Overall print through_____	15.0% less (better)
Porosity_____	+ 35.0% (better)
Tensile_____	even
Stiffness_____	+ 22% (better)
Static coefficient of friction_____	+ 5.0% (better)

15

25

A comparison of my new multi-phase CSH products with  
Huber's calcium silicate gave the following

30

Table 12f: Summary of Improvement over HuberSil

Opacity_____	+1.1 points
Ink Penetration_____	9.0% less (better)
Show through_____	9.0% less (better)
Overall print through_____	9.0% less (better)
Porosity_____	+ 29.0% (better)
Tensile_____	+16.0% (better)
Sheffield smoothness_____	10.0% less (better)

40

50

Once again, my multi-phase CSH product gives better paper and printing properties than currently available commercial calcium carbonate and commercial calcium silicate fillers.

5        During testing of my novel multi-phase calcium silicate hydrate products, conventional industry quality control standards were observed. Brightness was tested by using a GE/TAPPI Brightness Meter, Model S-4. Where applicable, the pH was tested with a pH meter utilizing  
10    TAPPI method T-667. Pulp beating was performed using a Valley Beater according to TAPPI Method T-200. Handsheets were produced using a British Handsheet Mold according to TAPPI Method T-205. Handsheet testing was for tensile strength used a one inch strip and otherwise was conducted  
15    according to TAPPI method T-220. Where applicable, freeness was tested utilizing a Canadian Standard Freeness tester according to TAPPI standard T-227. Ashing tests were conducted at 500 °C according to TAPPI Method T-211. Air permeability testing was conducted by Blaine, ASTM  
20    Method C204. Available lime was measured according to ASTM Method C25. For fine paper testing, a standard pulp slurry was made up of 75% hardwood and 25% softwood. Both pulp sources were beaten separately, in a Valley Beater, to a

specific Canadian Standard Freeness of  $450 \pm 10$  in accordance with TAPPI test methods T-200 and T-227. for newsprint testing, a standard newsprint pulp slurry was made up of 20% softwood kraft fibers, and 80% thermo-

5 mechanical pulp. Both pulp sources were received with Canadian Standard Freeness values of  $180 \text{ csf} \pm 25$ . This freeness value was deemed sufficient and no further beating was performed on the pulp. For the disintegration of the stock pulp solutions, hot water was added to help relax the

10 pulp fibers and prevent fiber clumps in the final sheet. Handsheets were formed from the above prepared stock, on a 6" British handsheet mold, in accordance with TAPPI test method T-205. However, since the goal of producing these handsheets was to test filler performance, some filler was

15 incorporated into the handsheets at various replacement levels (usually 15%, 20%, and 25%). In order to achieve comparability between different replacement levels, a constant basis weight was achieved via a reduction in fiber content. Thus, a 25% filled sheet contained only 75% of

20 the fiber that the unfilled sheet has. Also, a retention aid was utilized to hold the filler in the sheet until the sheet had dried completely. All other handsheet formation components were kept consistent with TAPPI test method T-

205. Handsheets utilizing titanium dioxide in fine paper were similarly formed, except that they required double the amount of retention aid as required by the other fillers.

In addition, when  $\text{TiO}_2$  was added in conjunction with another

5 filler, it was necessary to first add  $\text{TiO}_2$ , then add one dose of retention aid, and then add the filler and a second dose of retention aid. Handsheets formed for newsprint testing were prepared in a similar method to the fine paper handsheets. However, different filler loading levels were  
10 utilized. and the newsprint sheets were usually loaded at 3%, 6%, and 9% filler. The handsheets were tested in accordance with TAPPI test method T-220, except that a 25.4mm sample was used and the tensile index calculations were recalculated accordingly. Handsheets were ashed in  
15 accordance with TAPPI test method T-211.

In summary, the unique crystalline microfibrils produced as a product of the reactions described herein exist, in one unique product, as bundles sized from about 10 to about 40 microns, typically occurring as haystacks or  
20 balls. Preferably, individual fibers are about 0.2 microns in the largest cross-sectional dimension, with lengths of up to 4 or 5 microns, so as to have a relatively large L/D ratio.

Importantly, the crystalline microfibers as just described have advantageous properties when utilized as a paper filler, particularly in uncoated groundwood, and in coated groundwood, in uncoated fine paper, and in coated fine paper. The aforementioned adsorptive properties help to adsorb printing ink in the papers. Also, it helps the paper sheet itself to absorb fines, so that it improves overall sheet retention during the papermaking process. Overall, final paper products exhibit improved porosity, improved smoothness, improved bulk, and improved stiffness. Also, brightness and opacity are maintained or improved. Moreover, the printability of the final product is significantly improved, due to the improved ink adsorption.

It is to be appreciated that my unique, light, fluffy adsorptive calcium silicate hydrate products, and the method of producing the same, and the paper products produced using such products, each represent an appreciable improvement in the paper production arts. Although only a few exemplary embodiments of this invention have been described in detail, those skilled in the art may find that the processes described herein, and the products produced thereby, may be modified from those embodiments provided

herein, without materially departing from the novel teachings and advantages provided.

It will thus be seen that the objects set forth above, including those made apparent from the preceding description, are efficiently attained. Since certain changes may be made in carrying out production of the CSH products, and the unique paper products produce therewith, it is to be understood that my invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. Many other embodiments are also feasible to attain advantageous results utilizing the principles disclosed herein. Therefor, it will be understood that the foregoing description of representative embodiments of the invention have been presented only for purposes of illustration and for providing an understanding of the invention, and are not intended to be exhaustive or restrictive, or to limit the invention to the precise embodiments disclosed. The intention is to cover all modifications, equivalents, and alternatives falling within the scope and spirit of the invention, as expressed herein above and in the appended claims. As such, the claims are intended to cover the products, processes, methods, and equivalent processes and methods. The scope of the

invention, as described herein, is thus intended to  
included variations from the embodiments provided which are  
nevertheless described by the broad meaning and range  
properly afforded to the language herein, and as explained  
5 by and in light of the terms included herein, or by the  
legal equivalents thereof.

## CLAIMS

1. A method for increasing opacity of paper, said paper manufactured by drying a furnish mixture of an aqueous pulp slurry and preselected fillers, said method comprising
- 5 incorporating into said furnish mixture a multiple phase calcium silicate hydrate composing fushagite and xenotalite said multiple phase mixture having a fibrous crystalline structure comprising fushagite of a diameter of from about 0.1 to about 0.2 microns, and a length ranging from about 2
- 10 microns to about 5 microns, and xenotalite particles have a diameter of 0.1 to 0.3 microns and a length of from about 1 micron to about 3 microns.
2. The method as set forth in claim 1, wherein in said
- 15 multiple phase calcium silicate hydrate has a water absorption characteristic of at least 400 percent.
3. The method as set forth in claim 2, wherein said multiple phase calcium silicate hydrate has a water
- 20 absorption characteristic of at least 800 percent.

4. The method as set forth in claim 1, wherein said multiple phase calcium silicate hydrate has a water absorption of from about 500 percent to about 1000 percent.

5. The method as set forth in claim 1, wherein said multiple phase calcium silicate comprises a unique X-ray diffraction pattern, with a first calcium silicate hydrate component having a major peak at  $d=2.97 \text{ \AA}$ , and a median peak at  $d=2.31 \text{ \AA}$ , and a minor peak at  $d=5.05 \text{ \AA}$ , and with a second calcium silicate hydrate component having a major peak at  $d=3.11 \text{ \AA}$ , a median peak at  $d=1.75 \text{ \AA}$ , and a minor peak at  $d=3.66 \text{ \AA}$ .

6. The method as set forth in claim 1, wherein said multiple phases calcium silicate hydrate comprises a stable secondary particle, said stable secondary particle comprising an interlocking structure of primary fibrous crystals.

7. The method as set forth in claim 6, wherein said stable secondary particle comprises a porous haystack like structure of average diameter from about 10 to about 40 microns.

8. The method as set forth in claim 1, or in claim 5,  
wherein said multiple phase calcium silicate hydrate  
comprises a mixture of fushagite and xenotalite.

5 9. The method as set forth in claim 8, wherein the  
percentage of fushagite is at least seventy (70) percent.

10. The method as set forth in claim 8, wherein the  
percentage of fushagite is at least eighty (80) percent.

10

11. The method as set forth in claim 8, wherein the  
percentage of fushagite is at least ninety (90) percent.

15

12. The method as set forth in claim 1, or in claim 5,  
wherein said multiple phase calcium silicate hydrate  
comprises a hydrothermal reaction product of an aqueous  
suspension of lime and a siliceous material in a CaO to  
SiO<sub>2</sub> mole ratio of between 1.2 to 1 to 1.7 to 1.

20

13. The method as set forth in claim 1 or in claim 5,  
wherein said multiple phase calcium silicate hydrate  
comprises a hydrothermal reaction product of an aqueous

suspension of lime and a siliceous material in a CaO to SiO<sub>2</sub> mole ratio of about 1.35 to 1.

14. The method as set forth in claim 1 or in claim 5,  
5 wherein said paper has a Gurley porosity, and wherein in said Gurley porosity is simultaneously increased along with said bulk and with said opacity.

15. The method as set forth in claim 1 or in claim 5,  
10 wherein said paper has a measurable smoothness, and wherein in said measurable smoothness is simultaneously increased along with said bulk and with said opacity.

16. The method as set forth in claim 1 or in claim 5,  
15 wherein said paper has a measurable print show through, and wherein in measurable print show throw is decreased while simultaneously increasing bulk, opacity, porosity, and smoothness.

20 17. A paper composition containing an effective amount of a filler, said filler comprising a multiple phase calcium silicate hydrate comprising foshagite and xonotlite, and having peaks in the XRD patterns from the fushagite and

xenotalite components in the complex having the characteristic XDR shown in FIG. 1.

18. A paper composition according to claim 17, wherein  
5 said multiple phase calcium silicate hydrate has a water absorption range of at least about 500 percent.

19. A paper composition according to claim 17, wherein  
10 said multiple phase calcium silicate hydrate has a water adsorption range of up to approximately 1000 percent.

20. A process for producing a highly absorbent coating  
formulation for facilitating printing a paper substrate,  
said coating formulation produced by combining an effective  
15 amount of calcium silicate hydrate and an aqueous starch solution to form a coating mixture, adding a dispersant to said coating mixture, and adding a binder to said coating mixture, wherein said CSH comprises a multiple phase calcium silicate hydrate comprising foshagite and  
20 xonotlite, and having peaks in the XRD patterns from the fushagite and xenotalite components in the complex having the characteristic XDR shown in FIG. 1

21. A slurry of calcium silicate hydrate consisting essentially of the fibrous primary crystals interlocked in secondary particles of calcium silicate as defined in claim 1 and dispersed in water.

5

22. A slurry of calcium silicate crystals as defined in claim 21 in which contains the water is present in an amount of 80 percent or more by weight in said slurry.

10 23. A slurry of calcium silicate crystals as defined in claim 22 wherein at least about 95% of the secondary particles are less than 40 microns in outside diameter.

15 24. A slurry of calcium silicate crystals as defined in claim 23 wherein at least about 80% of the secondary particles are 10 to 40 microns in outside diameter.

25. A method for producing high stiffness paper, said paper manufactured by drying a furnish mixture of an aqueous pulp slurry and preselected fillers, said method comprising incorporating into said furnish mixture a multiple phase calcium silicate hydrate composing riversideite and xenotalite said multiple phase mixture

20

having a irregular globular structure having an outside diameter from about 10 to about 30 microns.

26. The method as set forth in claim 25, wherein in said  
5 multiple phase calcium silicate hydrate has a water absorption characteristic of at least 250 percent.

27. The method as set forth in claim 25, wherein said  
multiple phase calcium silicate hydrate has a water  
10 absorption characteristic of between 200 and 500 percent.

28. The method as set forth in claim 25, wherein said  
paper has a measurable stiffness and a measurable bulk, and  
wherein in said measurable stiffness is simultaneously  
15 increased along with said bulk.

29. The method as set forth in claim 25, wherein said  
paper has a measurable print show through, and wherein in  
measurable print show throw is decreased while  
20 simultaneously increasing bulk and stiffness.

## ABSTRACT

A method for the hydrothermal preparation of calcium silicate hydrates. Multi-phase calcium silicate hydrates, having unique physical and chemical properties, are prepared by hydrothermal reaction of specified ratios of CaO and SiO<sub>2</sub>, normally starting from slurries of slaked lime and from fluxed calcined diatomaceous earth, each of which is at about the atmospheric boiling point before being mixed and charged to a reactor, and pressurized. The hydrothermal reaction is carried out while maintaining the initial dilution for a preselected reaction time at a preselected reaction temperature. The calcium silicate hydrates produced have high water absorption and light scattering power, and have optical and physical properties making them highly desirable as a filler substitute in papermaking.



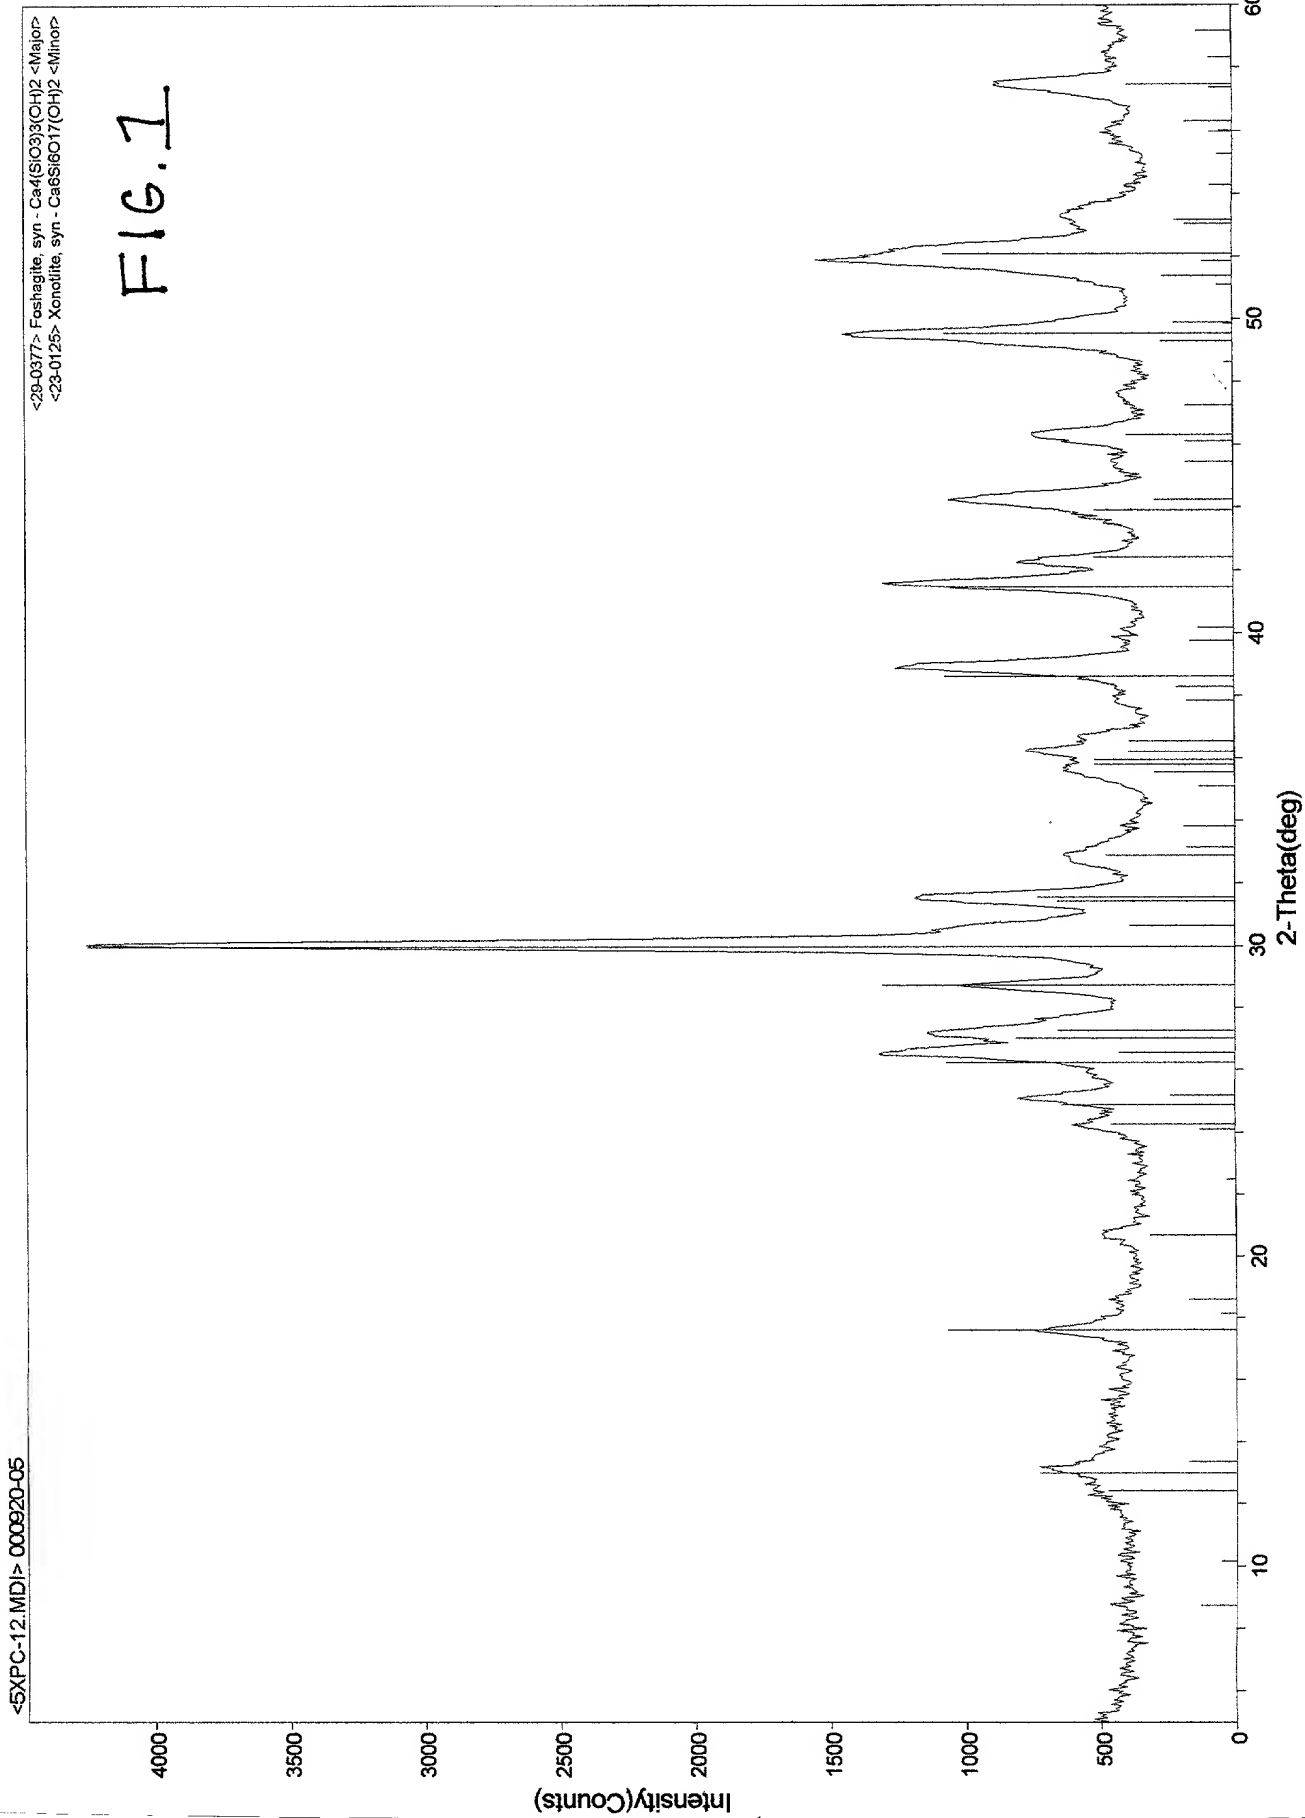


FIG. 3

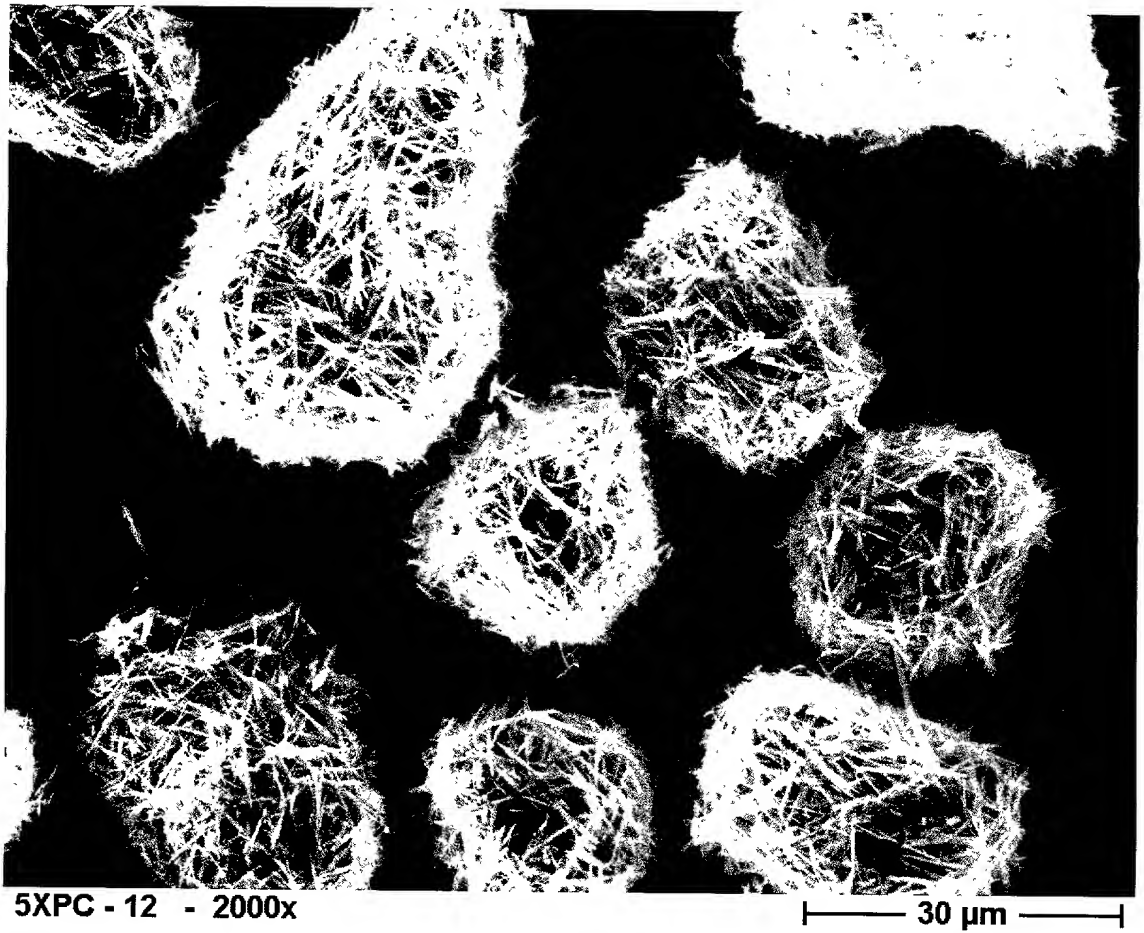


005030-2-464560

FIG. 2

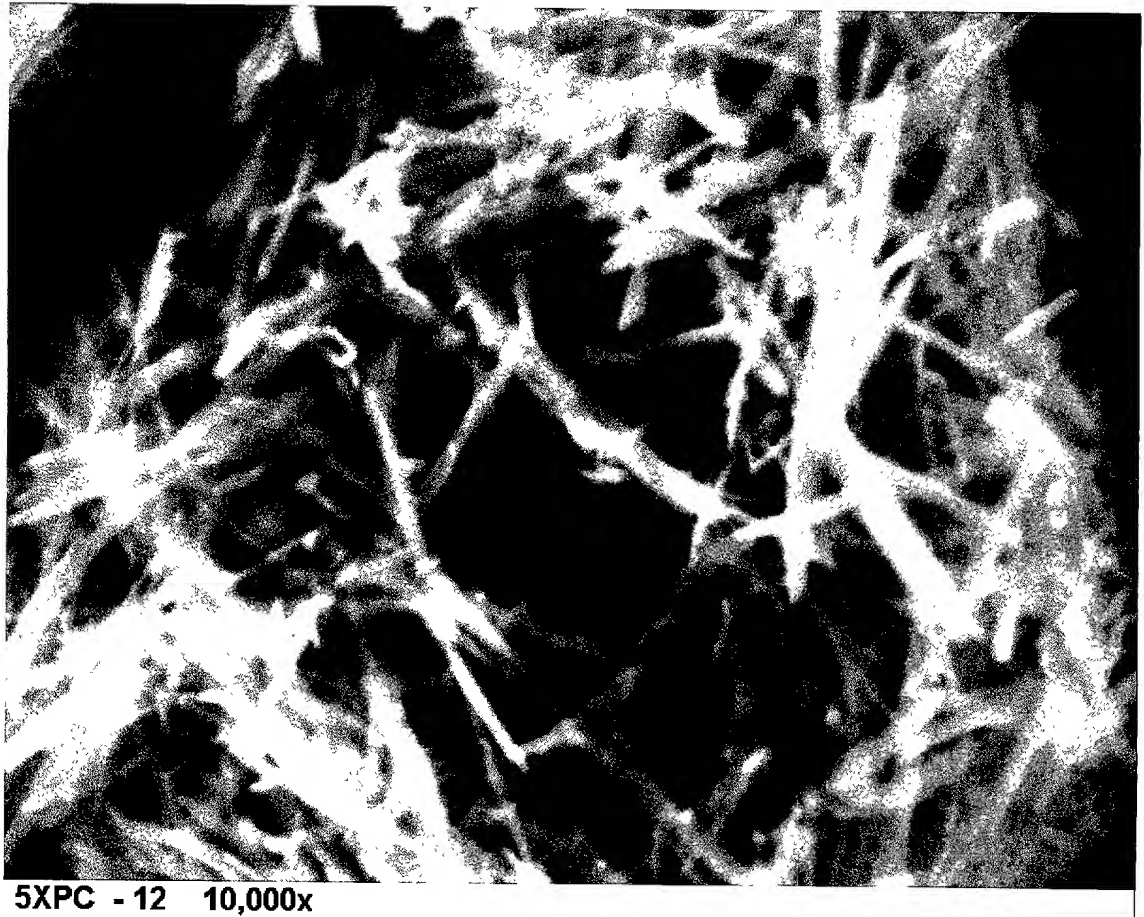


<29-0329> Riversideite-9A -  $\text{Ca}_5\text{Si}_6\text{O}_{18}(\text{OH})_2$  <Major>  
<23-0125> Xonotlite, syn -  $\text{Ca}_6\text{Si}_6\text{O}_{17}(\text{OH})_2$  <Major>

**FIG. 4**

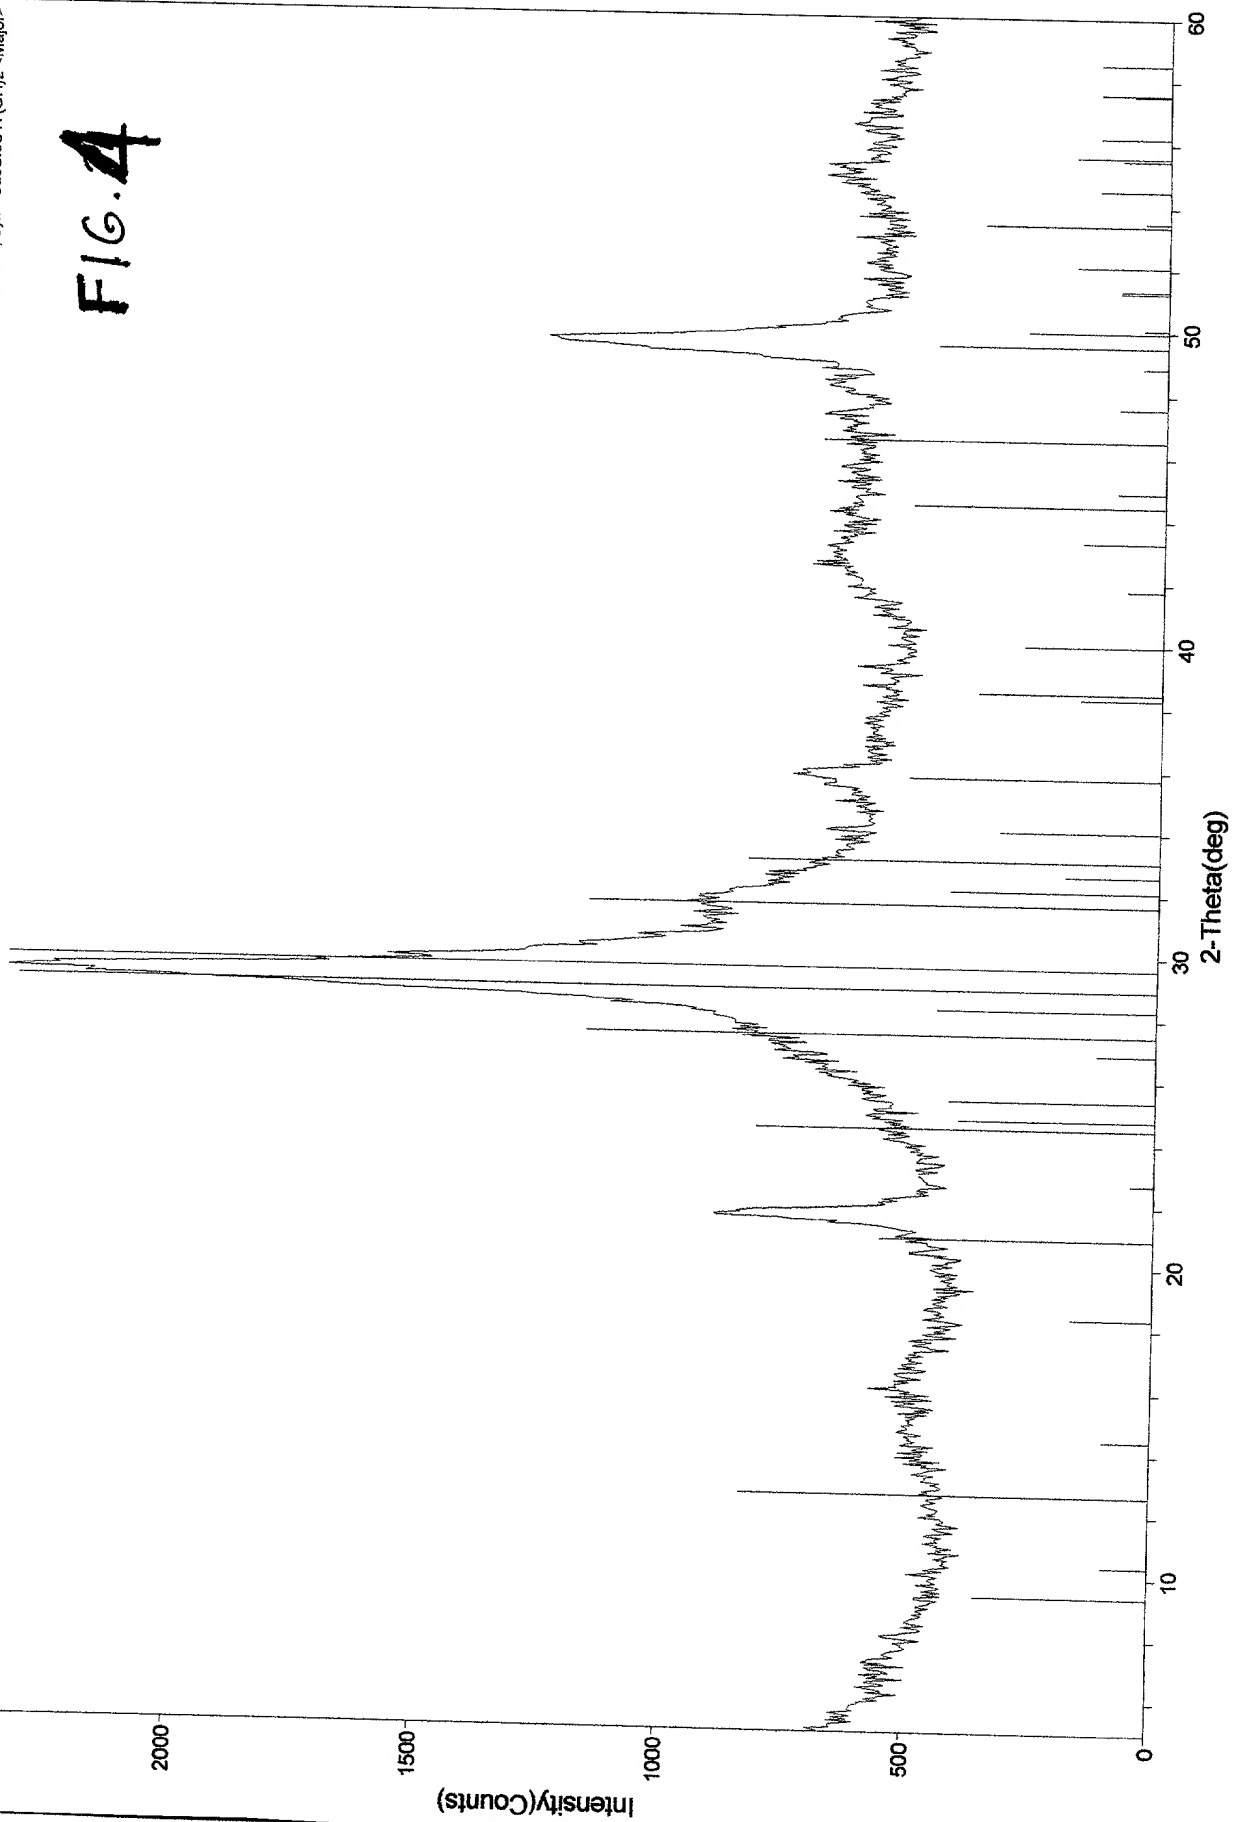

4/22


FIG 6

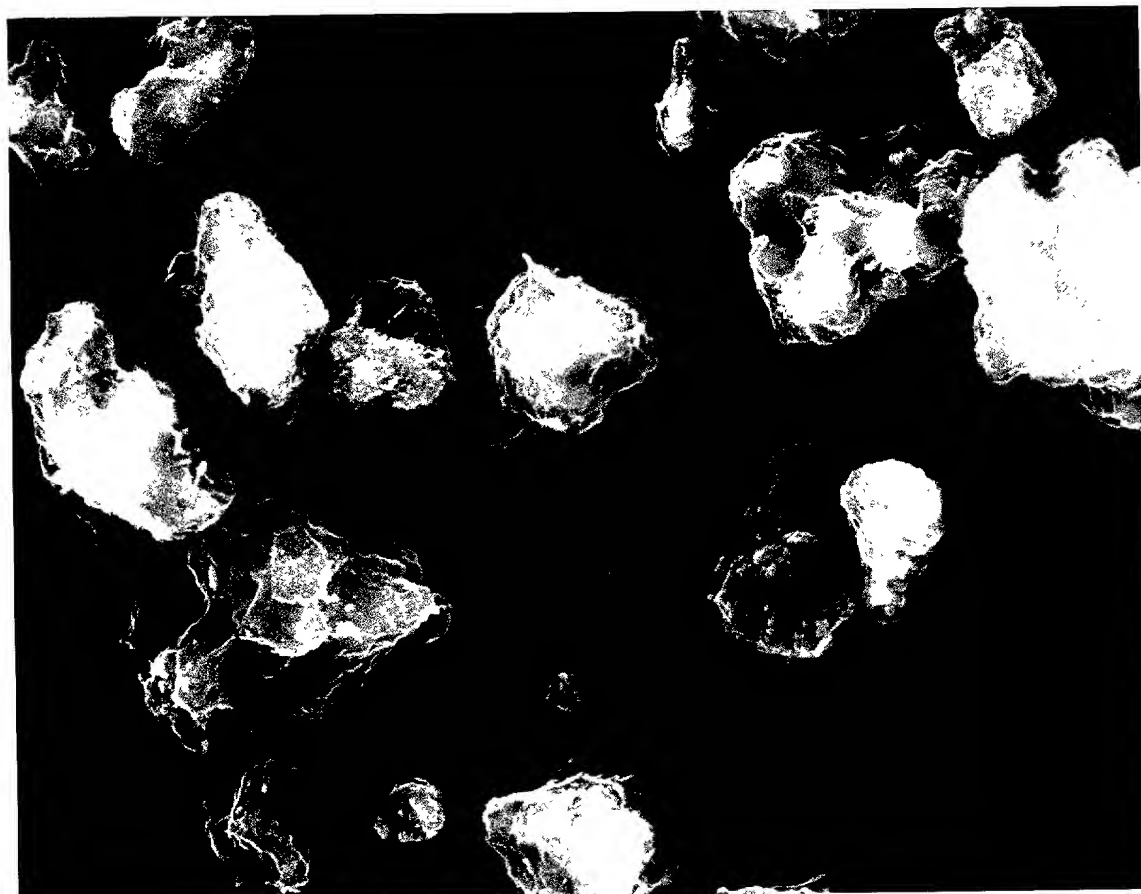

5XPC - 27 2,000x

30 μm

FIG. 5

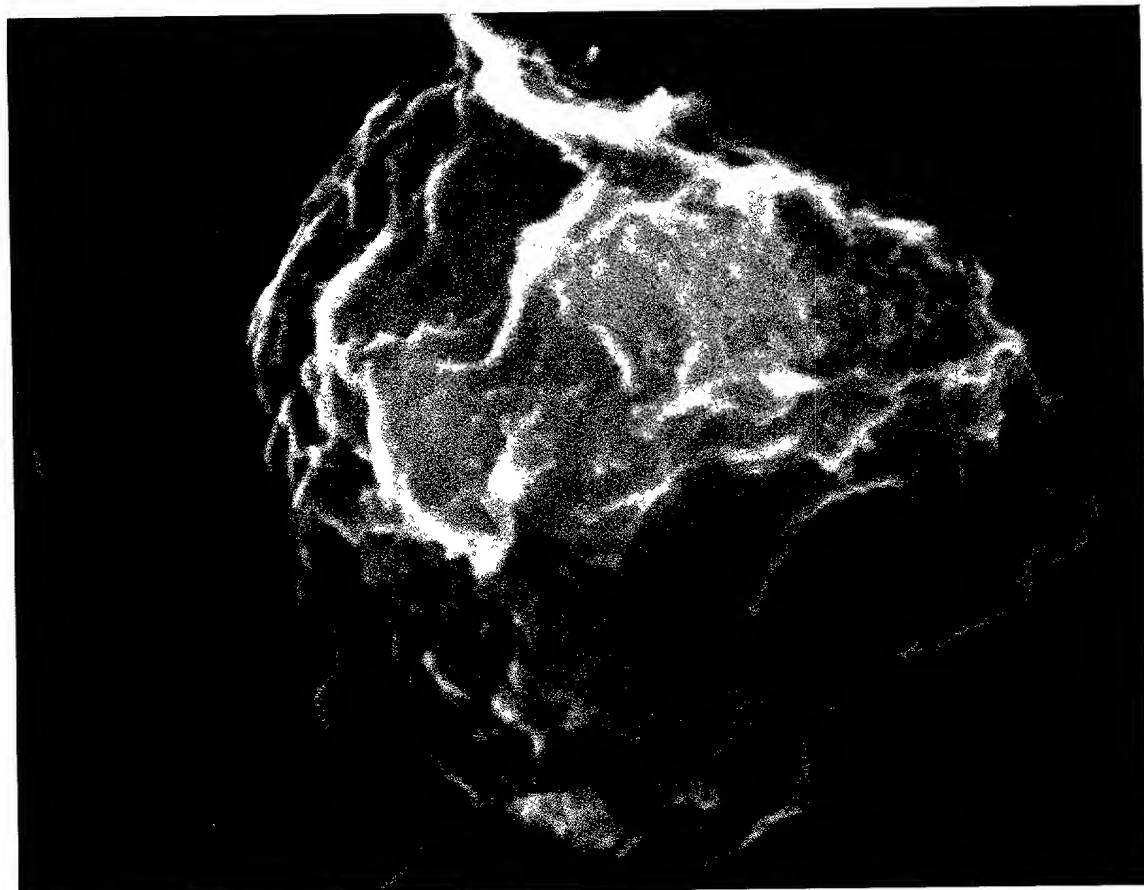

5XPC - 27 10,000x

5 μm

009280-6764960

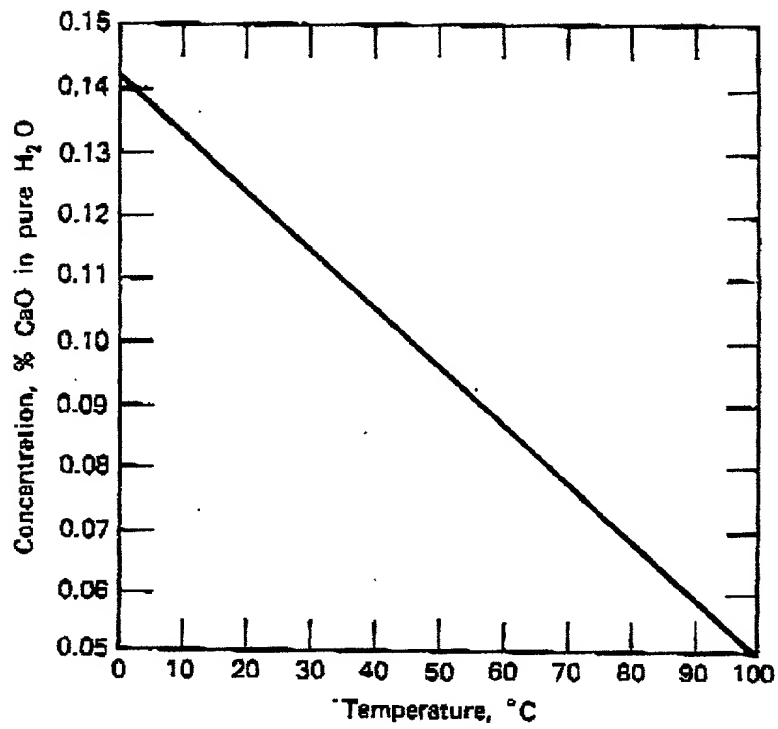


Figure 7: Solubility of lime in water

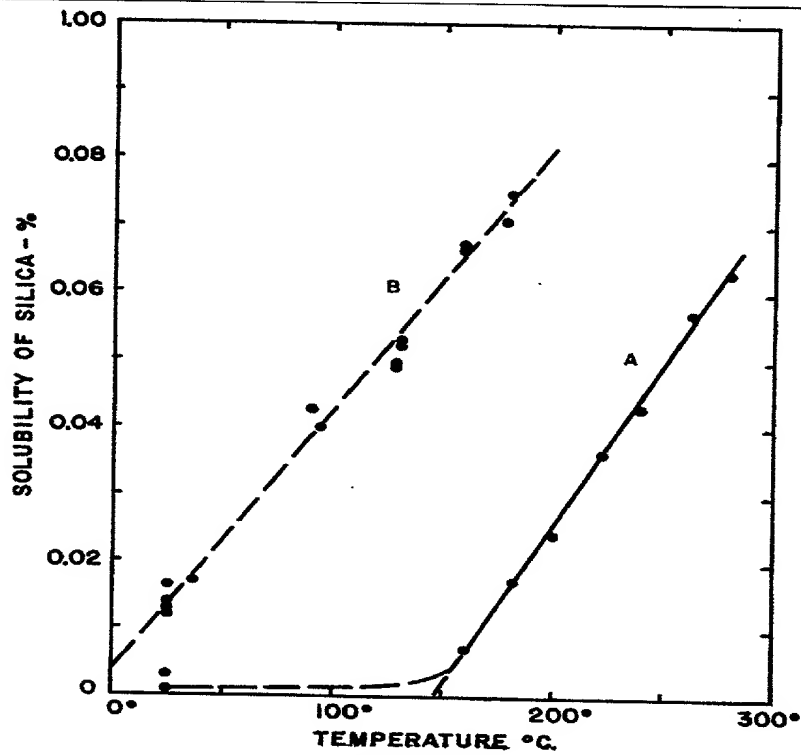


Figure 8: Solubility of silica in water

6/22

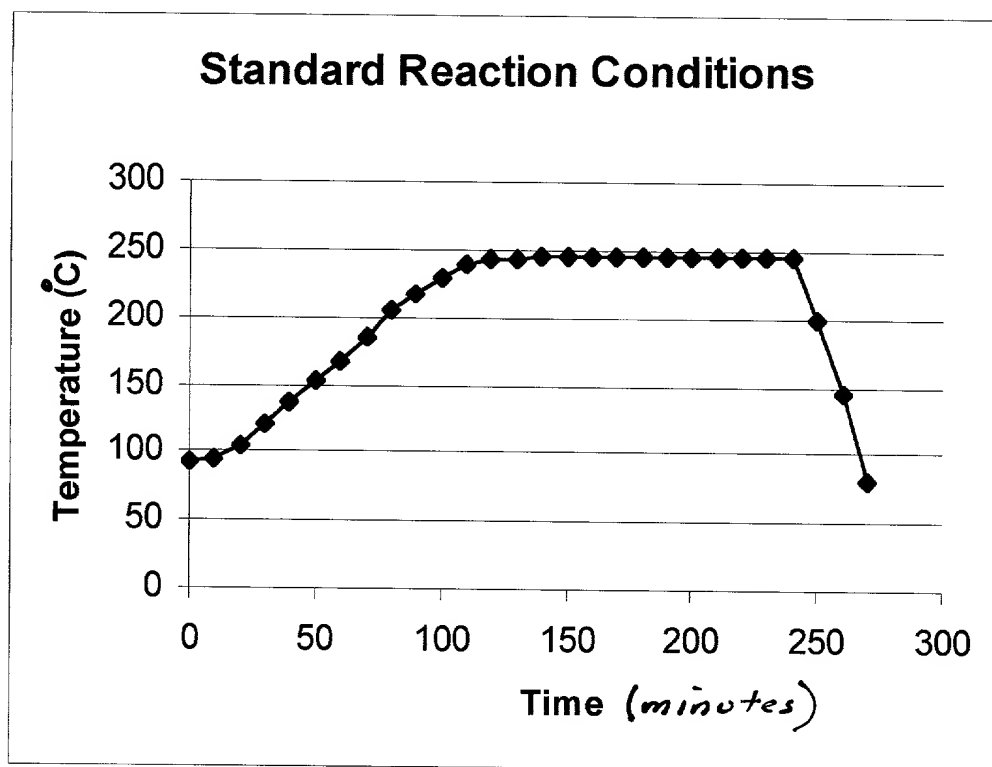


Figure 9: Heating/cooling cycle for a standard reaction

7/22

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Carbonate: PCC(HO)

Sheet Brightness

TiSil vs. PCC

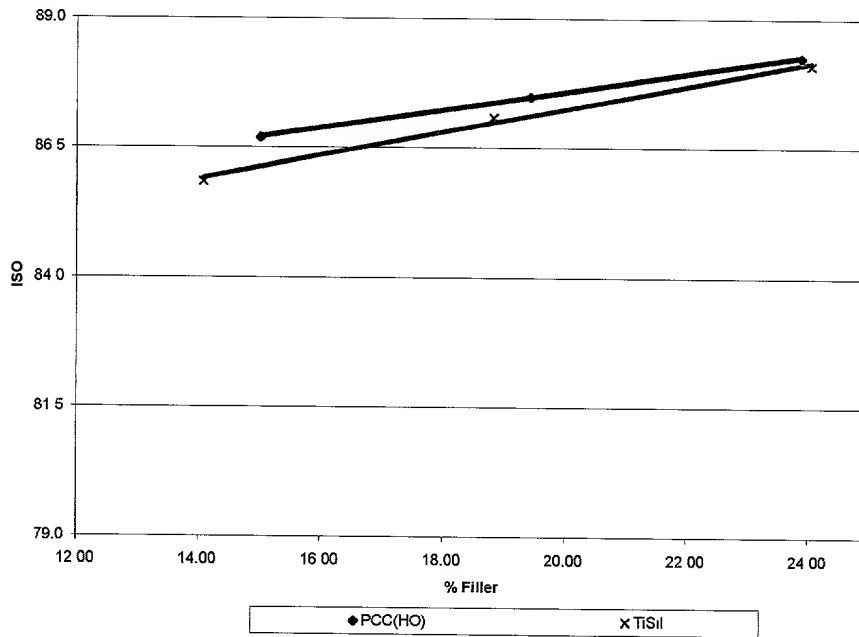


Fig 10: Sheet Brightness results for TiSil and PCC(HO)

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Carbonate: PCC(HO)

Sheet Opacity

TiSil vs. PCC

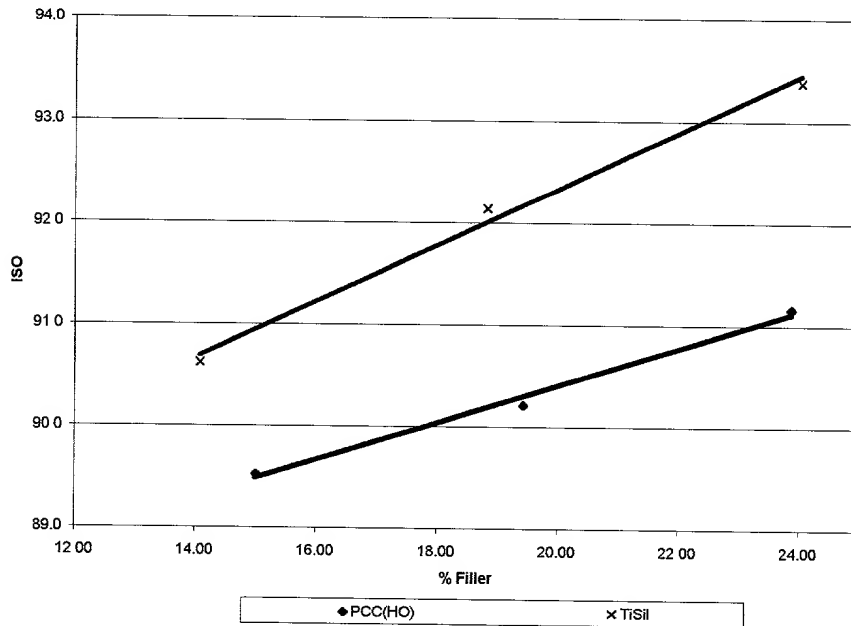


Fig 11: Sheet Opacity results for TiSil and PCC(HO)

8/22

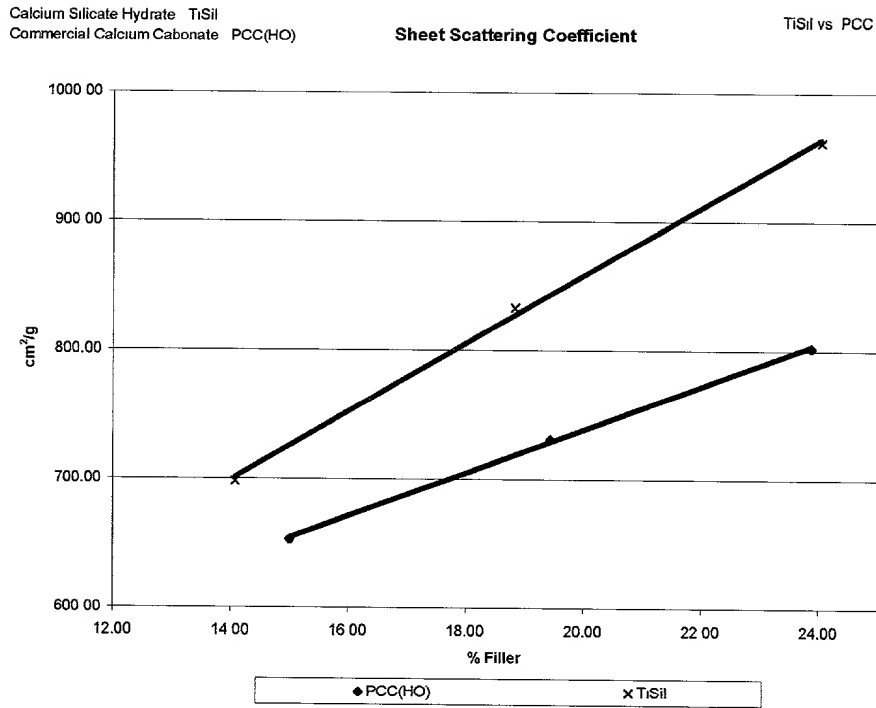


Fig 12: Sheet Scattering Coefficient results for TiSil and PCC(HO)

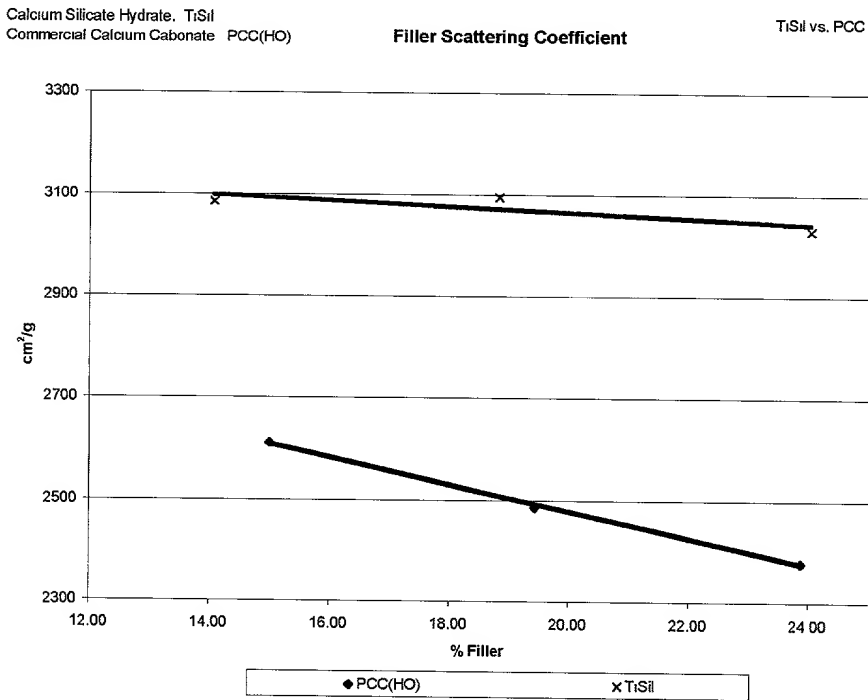


Fig 13: Filler Scattering Coefficient results for TiSil and PCC(HO)

9/22

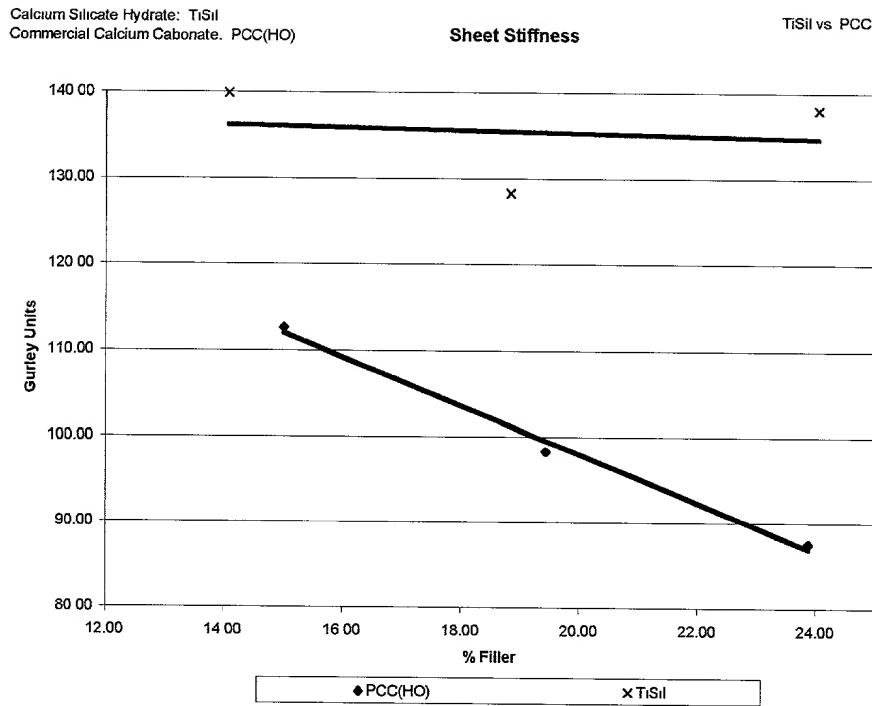


Fig 14: Sheet Stiffness results for TiSil and PCC(HO)


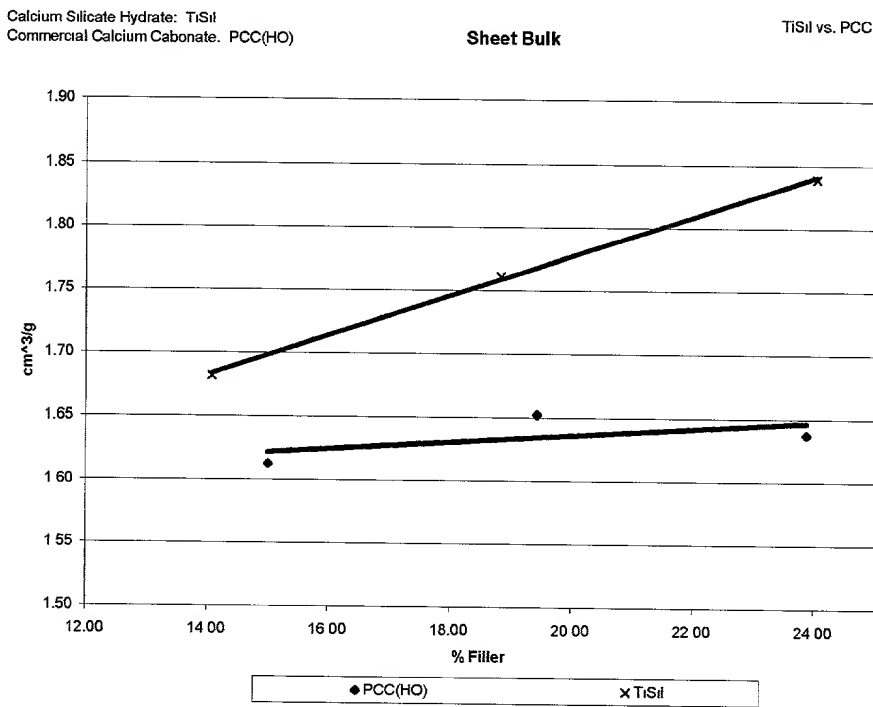


Fig 15: Sheet Bulk results for TiSil and PCC(HO)


10/22

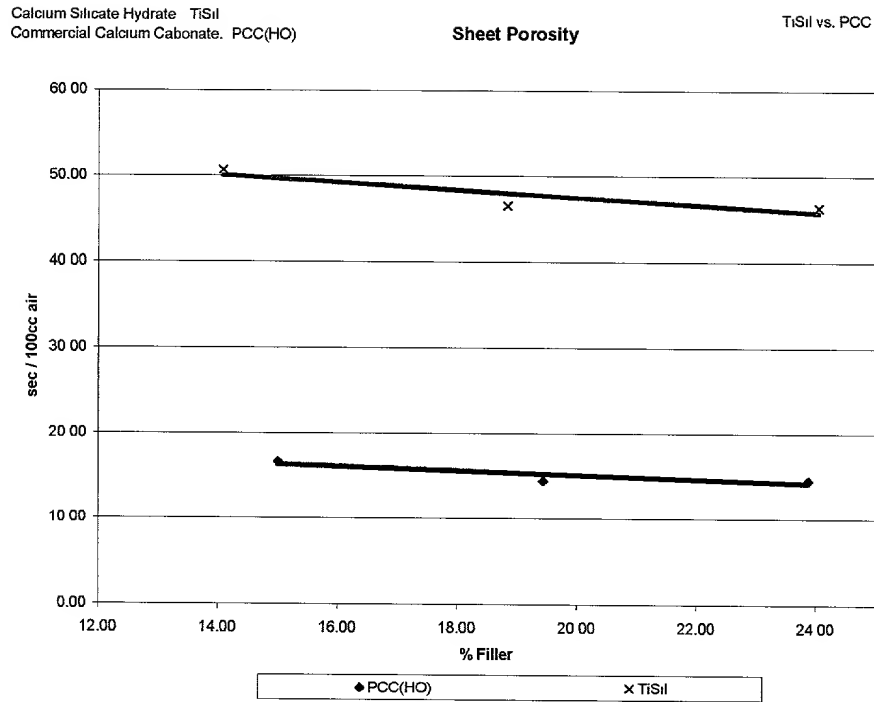

**Fig 16: Sheet Porosity results for TiSil and PCC(HO)**

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Carbonate: PCC(HO)

TiSil vs. PCC

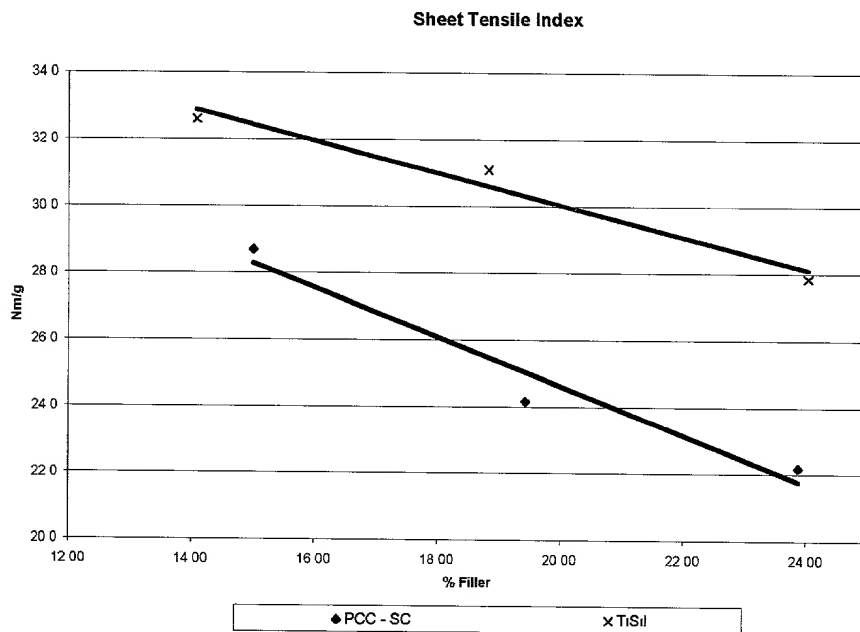


**Fig 17: Sheet Tensile Index results for TiSil and PCC(HO)**

11/22

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Carbonate w/TiO<sub>2</sub>  
PCC(HO) + 60 lb/ton TiO<sub>2</sub>

### Sheet Brightness

TiSil vs. PCC w/TiO<sub>2</sub>

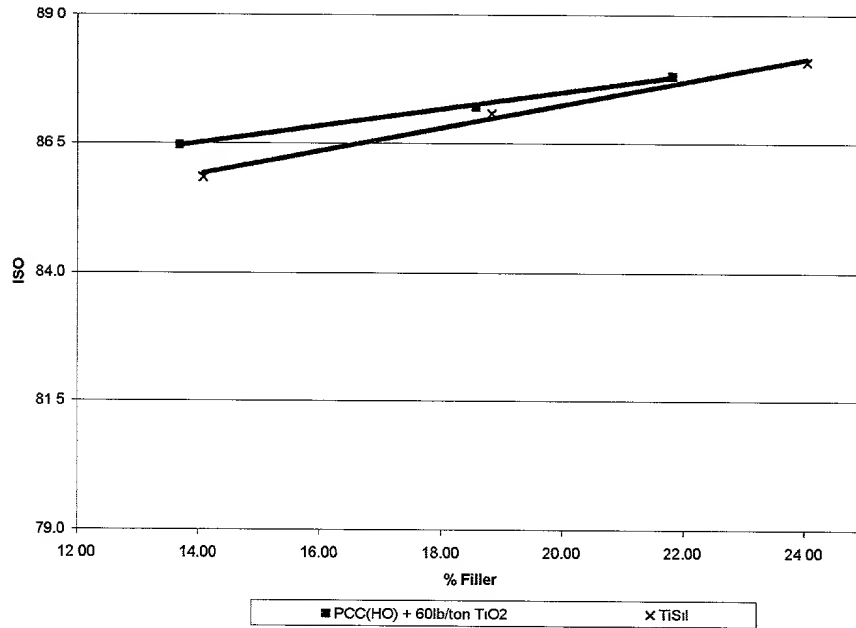


**Fig 18: Sheet Brightness results for TiSil and PCC(HO) w/TiO<sub>2</sub>**

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Carbonate w/TiO<sub>2</sub>  
PCC(HO) + 60 lb/ton TiO<sub>2</sub>

### Sheet Opacity

TiSil vs. PCC w/TiO<sub>2</sub>

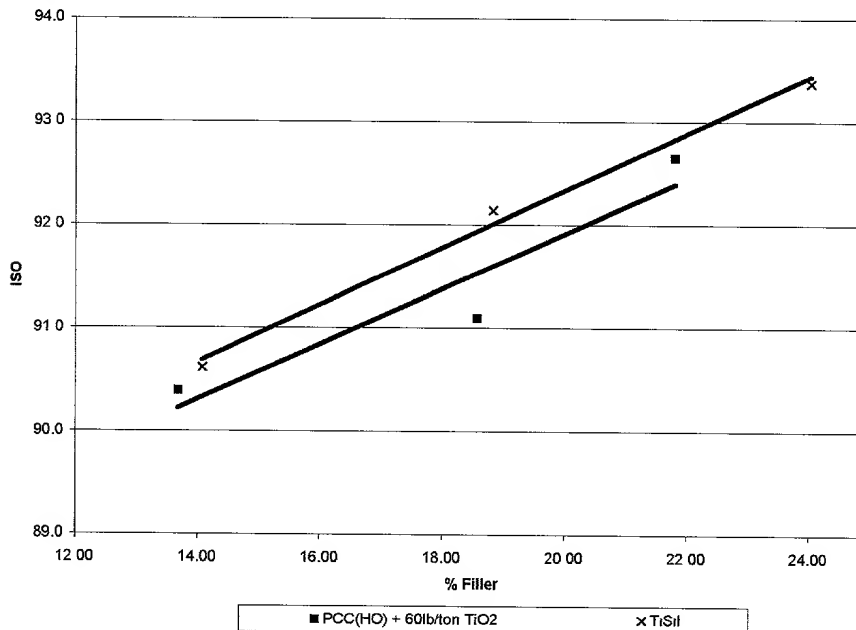


**Fig 19: Sheet Opacity results for TiSil and PCC(HO) w/TiO<sub>2</sub>**

12/22

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Carbonate w/TiO<sub>2</sub>  
PCC(HO) + 60 lb/ton TiO<sub>2</sub>

### Sheet Scattering Coefficient

TiSil vs. PCC w/TiO<sub>2</sub>

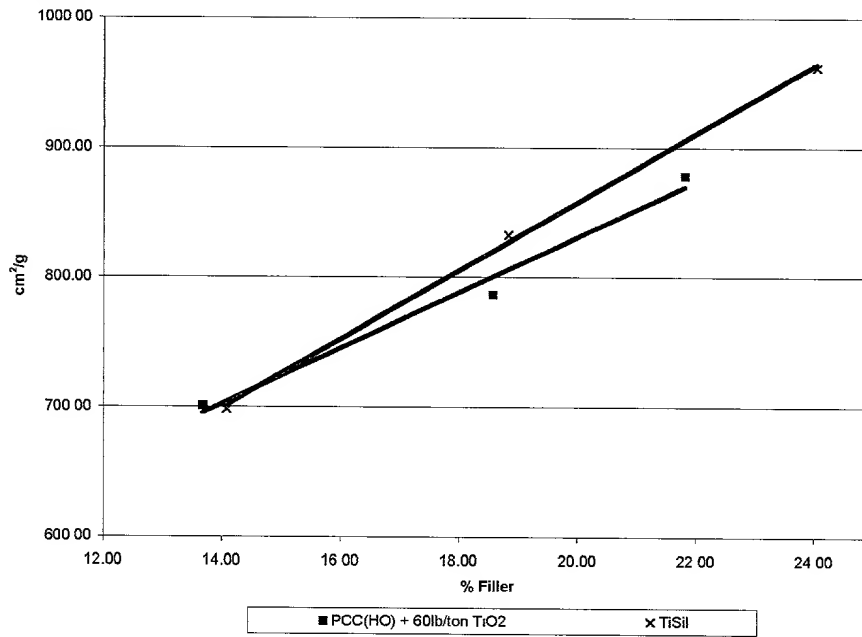


**Fig 20: Sheet Scattering Coefficient results for TiSil and PCC(HO) w/TiO<sub>2</sub>**

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Carbonate w/TiO<sub>2</sub>:  
PCC(HO) + 60 lb/ton TiO<sub>2</sub>


### Filler Scattering Coefficient

TiSil vs. PCC w/TiO<sub>2</sub>

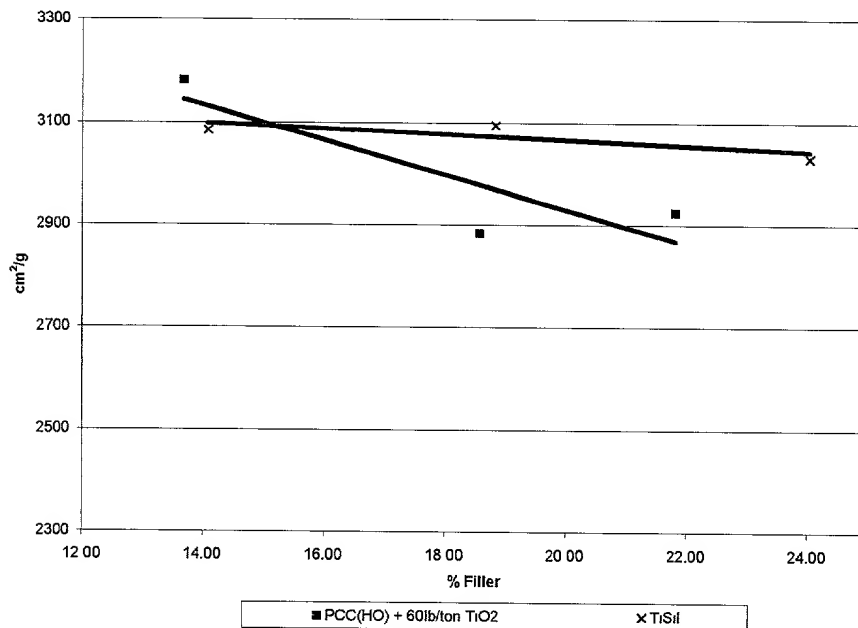


**Fig 21: Filler Scattering Coefficient results for TiSil and PCC(HO) w/TiO<sub>2</sub>**

13/22

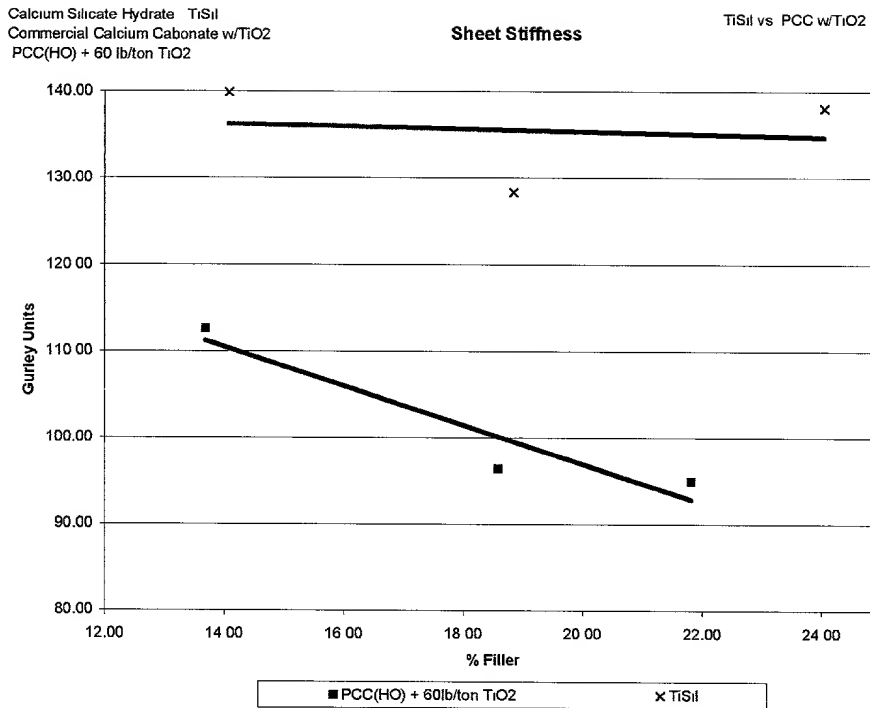

**Fig 22: Sheet Stiffness results for TiSil and PCC(HO) w/TiO<sub>2</sub>**

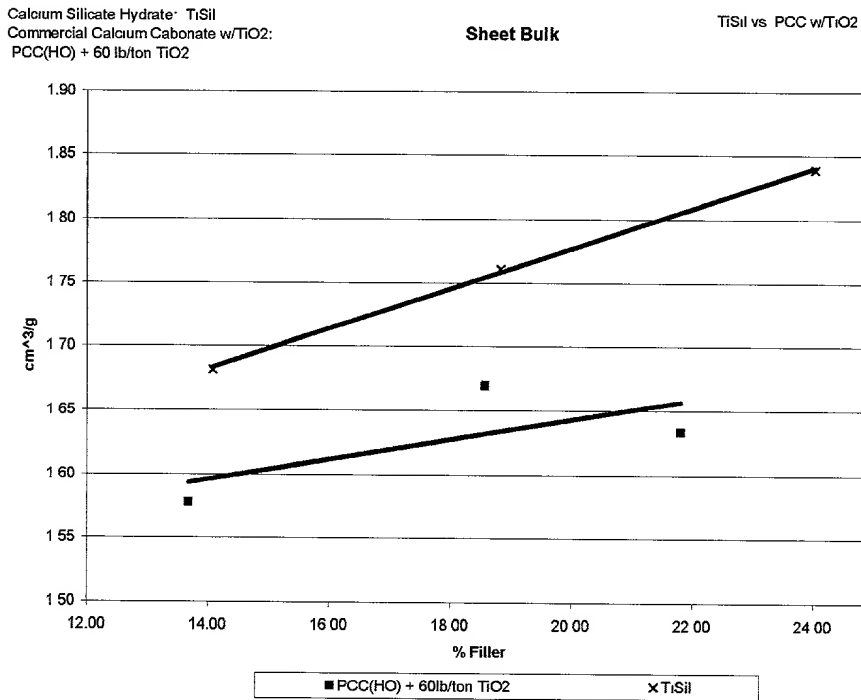


**Fig 23: Sheet Bulk results for TiSil and PCC(HO) w/TiO<sub>2</sub>**

14/22

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Carbonate w/TiO<sub>2</sub>  
PCC(HO) + 60 lb/ton TiO<sub>2</sub>

### Sheet Porosity

TiSil vs. PCC w/TiO<sub>2</sub>

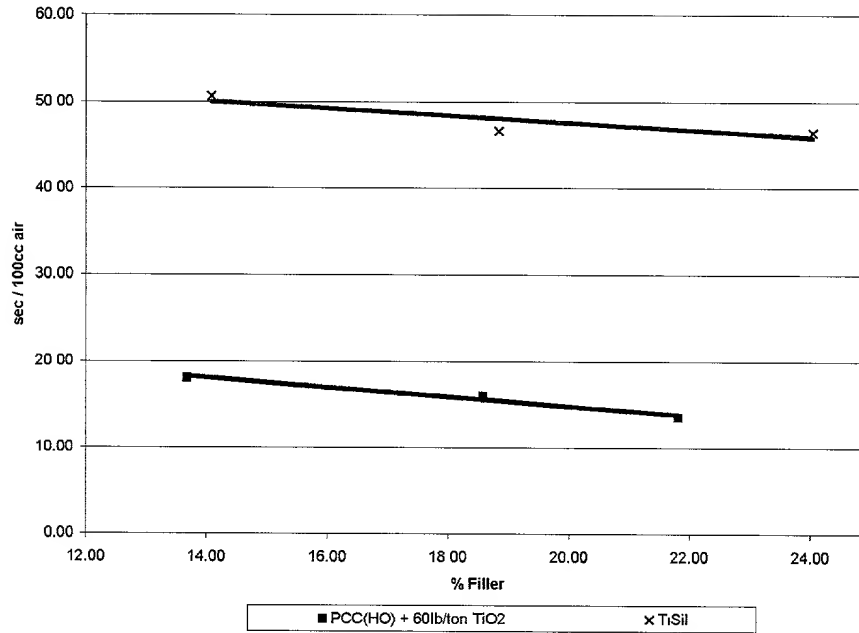


**Fig 24: Sheet Porosity results for TiSil and PCC(HO) w/TiO<sub>2</sub>**

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Carbonate w/TiO<sub>2</sub>  
PCC(HO) + 60 lb/ton TiO<sub>2</sub>

TiSil vs PCC w/TiO<sub>2</sub>

### Sheet Tensile Index

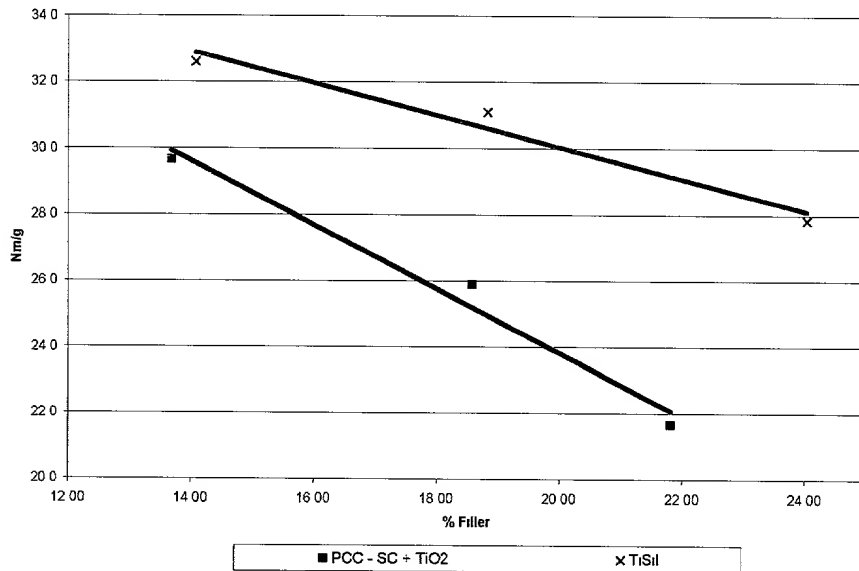

**Fig 25: Sheet Tensile Index results for TiSil and PCC(HO) w/TiO<sub>2</sub>**

15/22

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Silicate: Bulkite

### Sheet Opacity

TiSil vs. Bulkite

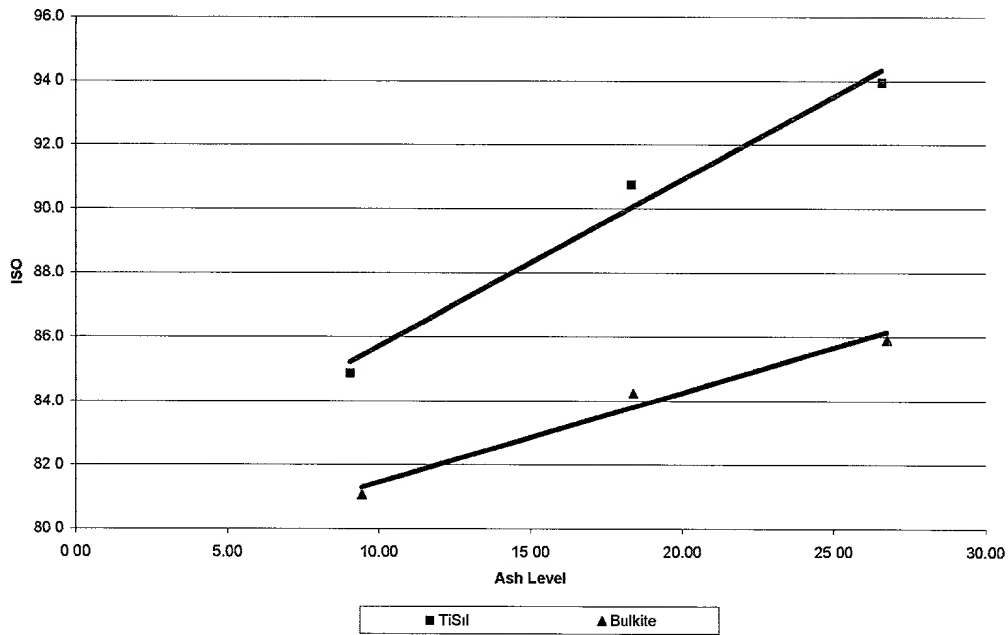


Fig 26: Sheet Opacity results for TiSil and Bulkite

Calcium Silicate Hydrate: TiSil  
Commercial Calcium Silicate: Bulkite

### Sheet Scattering Coefficient

TiSil vs. Bulkite

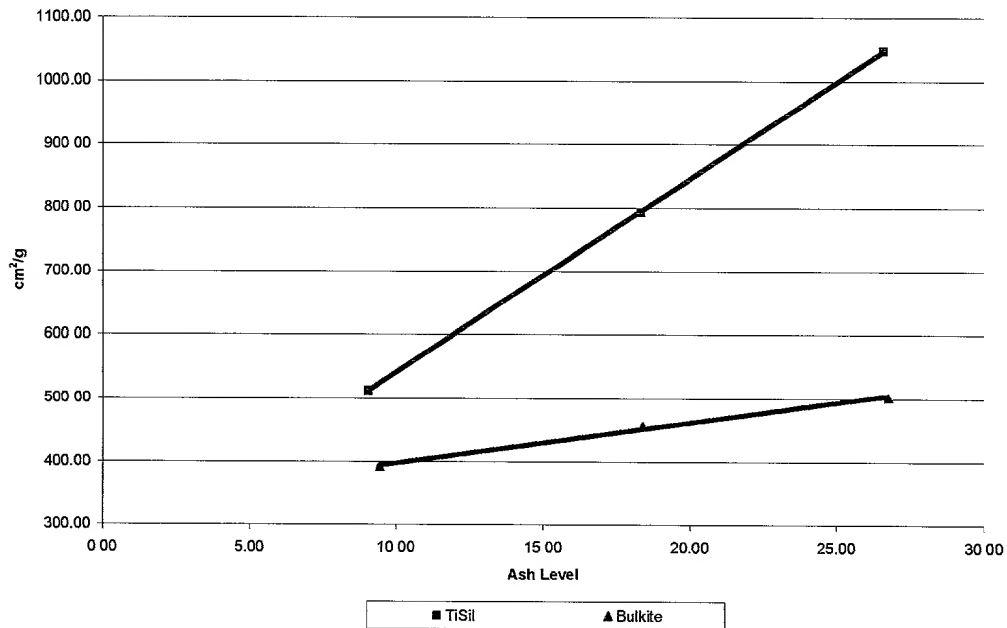


Fig 27: Sheet Scattering Coefficient results of TiSil and Bulkite

16/22

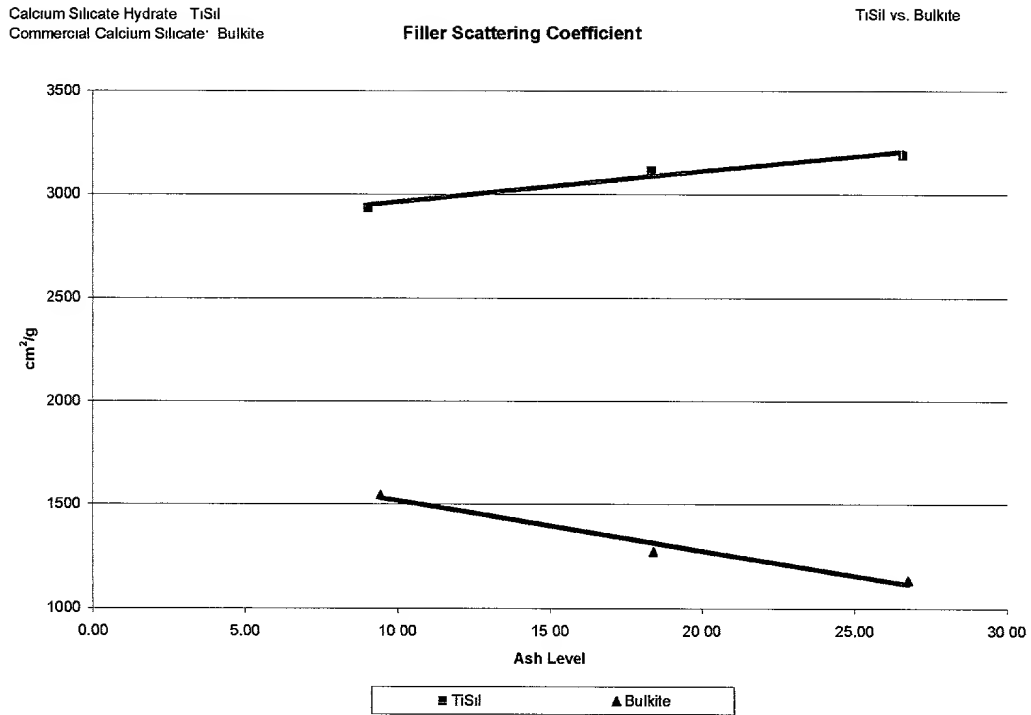


Fig 28: Filler Scattering Coefficient results for TiSil and Bulkite

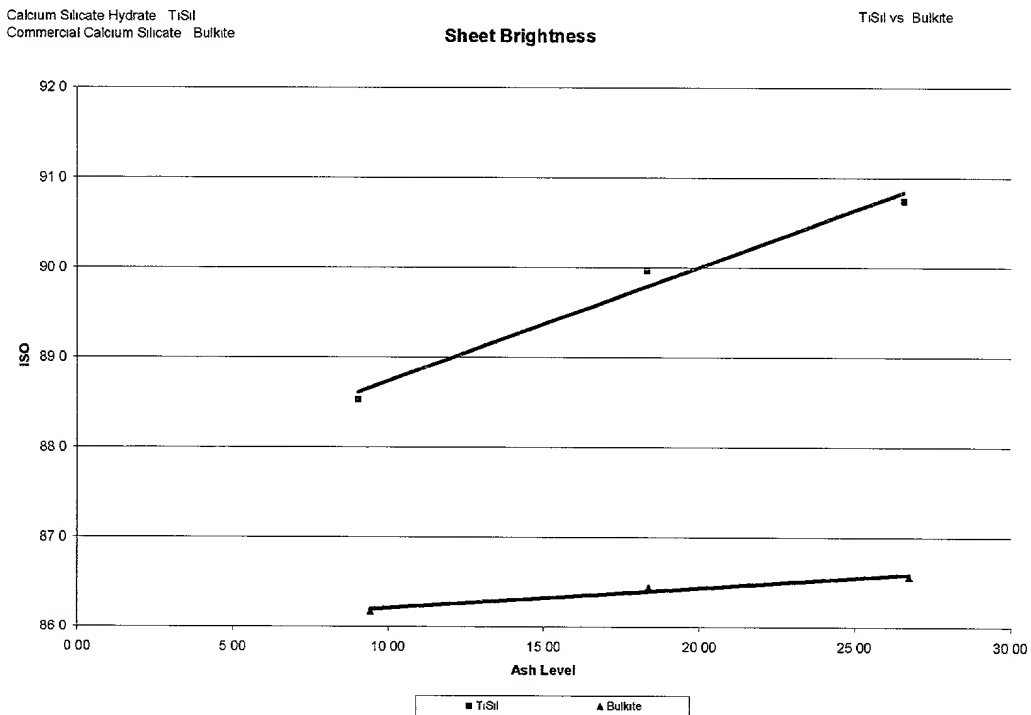


Fig 29: Sheet Brightness results for TiSil and Bulkite

Calcium Silicate Hydrate, TiSil  
Commercial Calcium Silicate, Bulkite

### Sheet Porosity

TiSil vs Bulkite


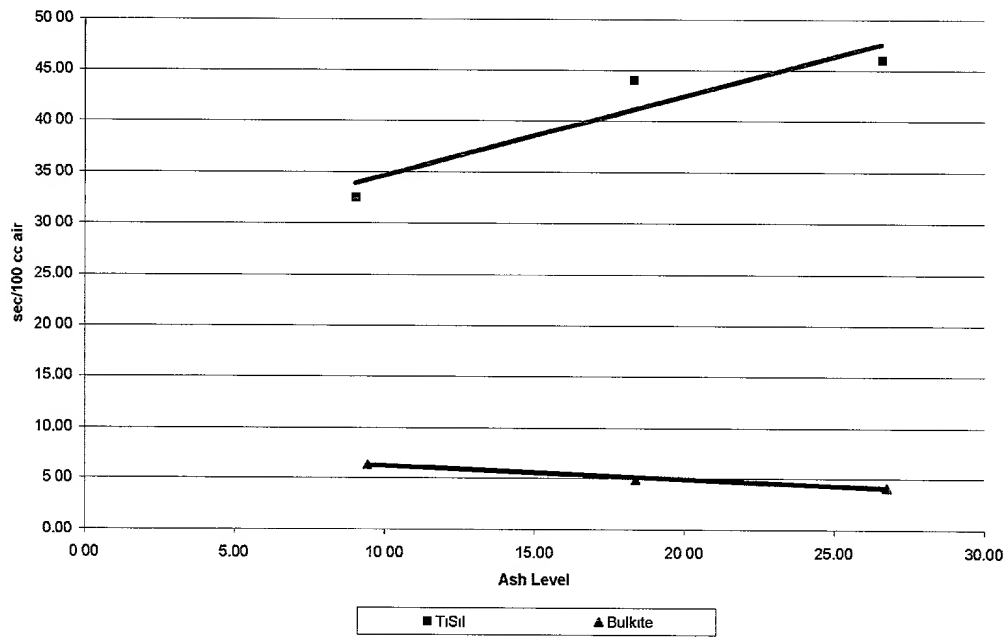


Fig 30: Sheet Porosity results for TiSil and Bulkite

Calcium Silicate Hydrate: TiSil  
 Commercial Silicate: HuberSil  
 Commercial Carbonate: Huber Carbonate

Normalized Sheet Opacity  
 (Interpolated to 6% Filler)

TiSil vs. HuberSil and Huber Carbonate

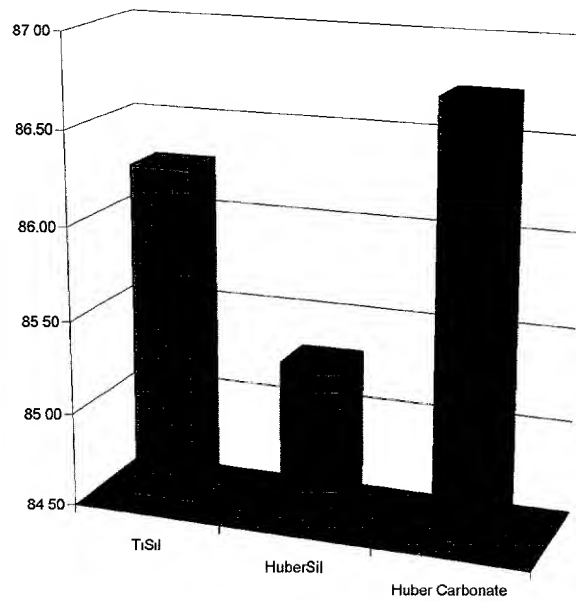


**Fig 31: Normalized Sheet Opacity results for newsprint sheets containing various fillers, interpolated to 6% Ash.**



Calcium Silicate Hydrate: TiSil  
 Commercial Silicate: HuberSil  
 Commercial Carbonate: Huber Carbonate

Sheet Ink Penetration  
 (Interpolated to 6% Filler)

TiSil vs. HuberSil and Huber Carbonate

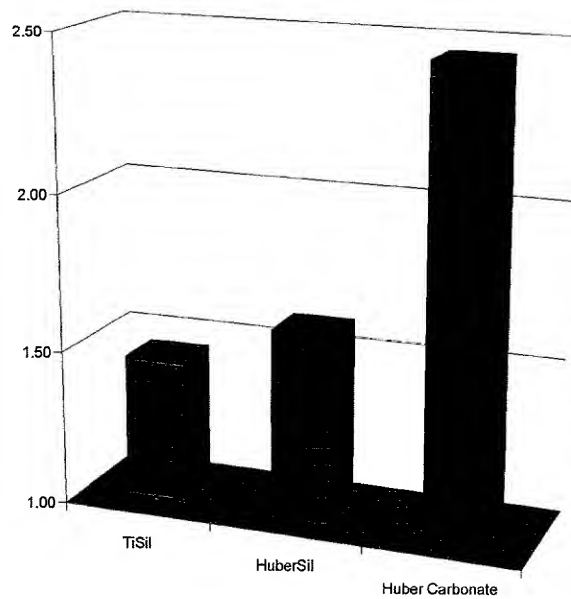

**Fig 32: Sheet Ink Penetration results on newsprint sheets containing various fillers, interpolated to 6% Ash.**




20/22

Calcium Silicate Hydrate    TiSil  
Commercial Silicate    HuberSil  
Commercial Carbonate    Huber Carbonate

Gurley Sheet Porosity  
(Interpolated to 6% Filler)

TiSil vs HuberSil and Huber Carbonate

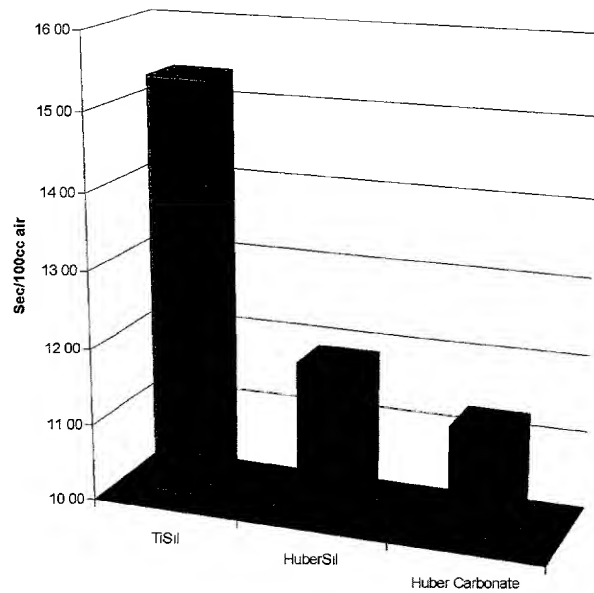


**Fig 35: Gurley Sheet Porosity results for newsprint sheets containing various fillers, interpolated to 6% Ash**

Calcium Silicate Hydrate    TiSil  
Commercial Silicate    HuberSil  
Commercial Carbonate    Huber Carbonate

Sheet Tensile Index  
(Interpolated to 6% Filler)

TiSil vs HuberSil and Huber Carbonate

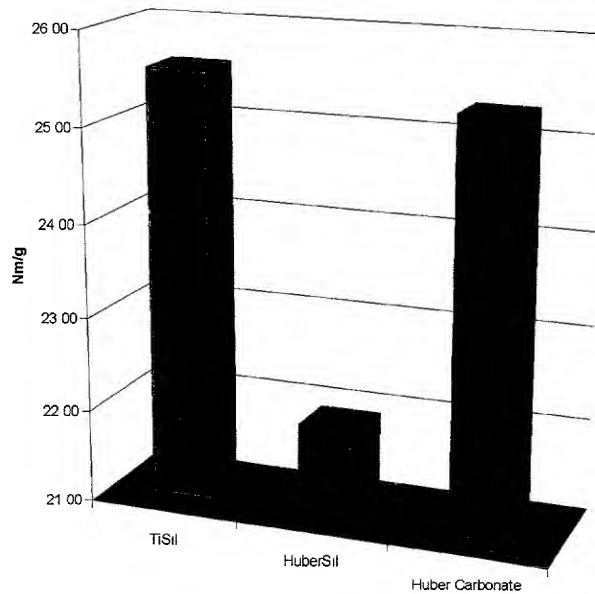

**Fig 36: Sheet Tensile Index results for newsprint sheets containing various fillers, interpolated to 6% Ash**


009030" E7464960

21/22

Calcium Silicate Hydrate: TiSiI  
Commercial Silicate: HuberSil  
Commercial Carbonate: Huber Carbonate

Gurley Sheet Stiffness  
(Interpolated to 6% Filler)

TiSiI vs HuberSil and Huber Carbonate

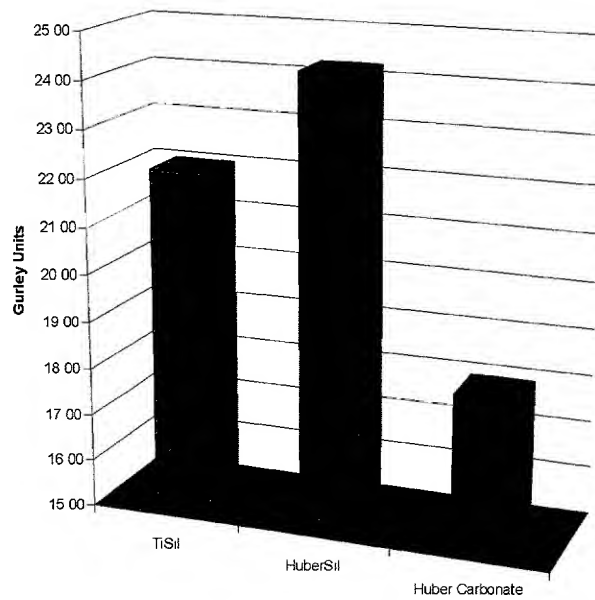


**Fig 37: Gurley Sheet Stiffness results for newsprint sheets containing various fillers, interpolated to 6% Ash**

Calcium Silicate Hydrate: TiSiI  
Commercial Silicate: HuberSil  
Commercial Carbonate: Huber Carbonate

Sheet Static Coefficient of Friction  
(Interpolated to 6% Filler)

TiSiI vs HuberSil and Huber Carbonate

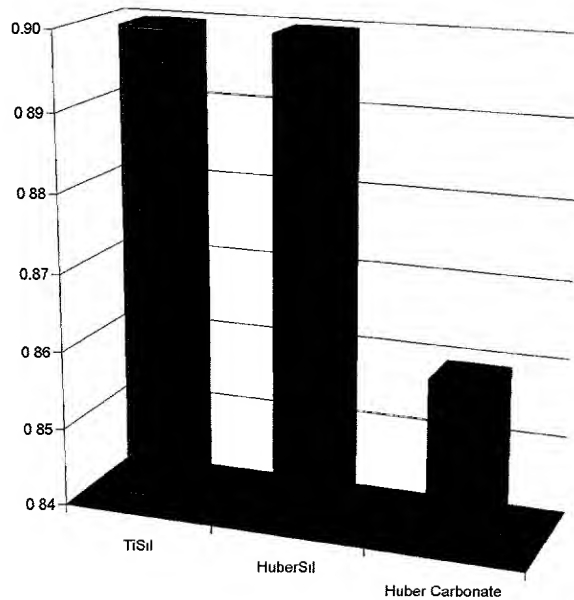


**Fig 38: Sheet Static Coefficient of Friction results for newsprint sheets containing various fillers, interpolated to 6% Ash**

Calcium Silicate Hydrate    TiSil  
Commercial Silicate    HuberSil  
Commercial Carbonate    Huber Carbonate

Sheffield Sheet Smoothness  
(Interpolated to 6% Filler)

TiSil vs. HuberSil and Huber Carbonate

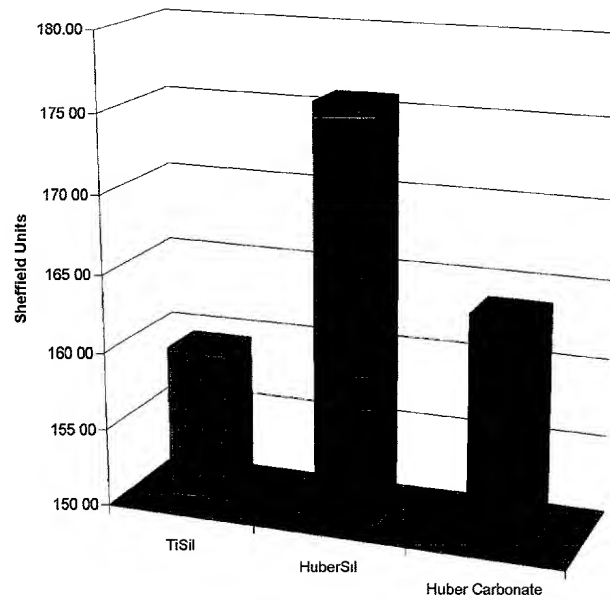

**Fig 39: Sheffield Sheet Smoothness results for newsprint sheets containing various fillers, interpolated to 6% Ash.**

**COMBINED DECLARATION AND POWER OF ATTORNEY**  
(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL,  
DIVISIONAL, CONTINUATION, OR C-I-P)

As a below named inventor, I hereby declare that:

**TYPE OF DECLARATION**

This declaration is of the following type:

- ☒ Original (nonprovisional)  
☐ Design  
☐ Supplemental  
☐ National Stage of PCT  
☐ Divisional  
☐ Continuation  
☐ Continuation-In-Part (CIP)

**INVENTORSHIP IDENTIFICATION**

My residence, post office address and citizenship are as stated below, next to my name. I believe that I am the original, first and sole inventor or an original, first and joint inventor of the subject matter that is claimed, and for which a patent is sought on the invention entitled:

**TITLE OF INVENTION**

MULTI-PHASE CALCIUM SILICATE HYDRATES, METHODS FOR THEIR  
PREPARATION, AND IMPROVED PAPER AND PIGMENT PRODUCTS  
PRODUCED THEREWITH

**SPECIFICATION IDENTIFICATION**

the specification of which:

- (a) ☒ is attached hereto.  
(b) ☐ was filed on \_\_\_\_\_ as Serial No.: \_\_\_\_\_  
(c) ☐ was described and claimed in PCT International  
Application No. \_\_\_\_\_ filed on \_\_\_\_\_ and as  
amended under PCT Article 19 on \_\_\_\_\_.

**SUPPLEMENTAL DECLARATION (37 CFR § 1.67(b))**

- ☐ I hereby declare that the subject matter of the  
☐ attached amendment  
☐ amendment filed on \_\_\_\_\_

was part of my/our invention and was invented before the filing date of the original application, above-identified, for such invention.

#### **ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR**

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information, which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56. and which is material to the examination of this application, namely, information where there is a substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent, and

I do not know and do not believe that the invention was ever known or used in the United States of America before my invention thereof.

I do not know and do not believe that the invention was ever patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, considering the benefit of any priority claimed hereinbelow.

I do not know and do not believe that the invention was in public use or on sale in the United States of America more than one year prior to this application, considering the benefit of any priority claimed hereinbelow.

#### **PRIORITY CLAIM (35 U.S.C. §§ 119(a) - (d))**

I hereby claim foreign priority benefits under Title 35, United States Code, §§ 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(d) ☒ no such applications have been filed.

(e) ☐ such applications have been filed as follows:

PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS  
(6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION AND ANY  
PRIORITY CLAIMS UNDER 35 U.S.C. § 119(a) - (d))

COUNTRY (or indicate if PCT)	APPLICATION NUMBER	DATE OF FILING (day/mon/yr)	PRIORITY CLAIMS UNDER 37 USC 119
			__ YES __ NO
			__ YES __ NO

**CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL  
APPLICATION(S) (35 U.S.C. § 119(e))**

I hereby claim the benefit under Title 35, United States Code, §  
119(e) of any United States provisional application(s) listed  
below:

PROVISIONAL APPLICATION NUMBER

60/150,862

FILING DATE

August 26, 1999

**CLAIM FOR BENEFIT OF EARLIER US/PCT  
APPLICATION(S) UNDER 35 U.S.C. § 120**

- ☐ The claim for benefit of any such applications are set forth  
in the attached ADDED PAGES TO COMBINED DECLARATION AND  
POWER OF ATTORNEY FOR DIVISIONAL, CONTINUATION OR  
CONTINUATION-IN-PART (CIP) APPLICATION.

**ALL FOREIGN APPLICATION(S), IF ANY, FILED  
MORE THAN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR  
TO THIS U.S. APPLICATION**

## POWER OF ATTORNEY

I hereby appoint the following practitioner to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

**R. REAMS GOODLOE, JR.**

**Reg. No.: 32,466**

I hereby appoint the practitioner associated with the Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Send correspondence to:

R. Reams Goodloe, Jr.

10725 - SE 256<sup>th</sup> Street, Suite 3  
Kent, Washington, 98031-6426

Direct telephone calls to:

R. Reams Goodloe, Jr.  
(253) 859-9128

**Customer Number: 20793**

## DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor:

VIJAY	K.	MATHUR
GIVEN NAME	MIDDLE INITIAL OR NAME	FAMILY (OR LAST NAME)

Inventor's Signature: Umathur

Date: \_\_\_\_\_ Country of Citizenship US

Residence: \_\_\_\_\_

Post Office Address: same as above

Full name of second joint inventor (if any):

GIVEN NAME	MIDDLE INITIAL OR NAME	FAMILY (OR LAST NAME)

Inventor's Signature: \_\_\_\_\_

Date: \_\_\_\_\_ Country of Citizenship \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

☐ **Signature** for third and subsequent joint inventors.  
Number of pages added \_\_\_\_.

☐ Added pages to combined declaration and power of attorney for divisional, continuation, or continuation-in-part (CIP) application. Number of pages added \_\_\_\_.

☒ This declaration ends with this page.

## APPENDIX 1 - LIST OF FIGURES

- Figure 1:** Figure 1 shows the X-ray diffraction pattern for the TiSil brand calcium silicate hydrate.
- Figure 2:** Figure 2 shows the S.E.M. photograph at 10,000 times magnification for the TiSil Brand calcium silicate hydrate.
- Figure 3:** Figure 3 shows the S.E.M. photograph at 2000 times magnification for the TiSil Brand calcium silicate hydrate.
- Figure 4:** Figure 4 shows the X-ray diffraction pattern for the StiSil brand calcium silicate hydrate.
- Figure 5:** Figure 5 shows the S.E.M. photograph at 10,000 times magnification for StiSil Brand calcium silicate hydrate.
- Figure 6:** Figure 6 shows the S.E.M photograph at 2000 times magnification for StiSil Brand calcium silicate hydrate.
- Figure 7:** Figure 7 shows a graphical representation of the solubility of lime in water.
- Figure 8:** Figure 8 shows a graphical representation of the solubility of silica in water.

**Figure 9:** Figure 9 shows a graphical representation of a standard heating/cooling cycle for the reaction process.

**Figure 10:** Figure 10 shows a graphical representation of the brightness results from handsheets containing the TiSil brand calcium silicate hydrate and a commercial PCC.

**Figure 11:** Figure 11 shows a graphical representation of the opacity results from handsheets containing the TiSil brand calcium silicate hydrate and a commercial PCC.

**Figure 12:** Figure 12 shows a graphical representation of the sheet scattering coefficient results from handsheets containing the TiSil brand calcium silicate hydrate and a commercial PCC.

**Figure 13:** Figure 13 shows a graphical representation of the filler scattering coefficient results from handsheets containing the TiSil brand calcium silicate hydrate and a commercial PCC.

**Figure 14:** Figure 14 shows a graphical representation of the sheet stiffness results from handsheets containing the TiSil brand calcium silicate hydrate and a commercial PCC.

**Figure 15:** Figure 15 shows a graphical representation of the sheet bulk results from handsheets containing the TiSil brand calcium silicate hydrate and a commercial PCC.

**Figure 16:** Figure 16 shows a graphical representation of the porosity results from handsheets containing the TiSil brand calcium silicate hydrate and a commercial PCC.

**Figure 17:** Figure 17 shows a graphical representation of the tensile index results from handsheets containing the TiSil brand calcium silicate hydrate and a commercial PCC.

**Figure 18:** Figure 18 shows a graphical representation of the brightness results from handsheets containing the TiSil brand calcium silicate hydrate and a PCC with 60lb/ton  $\text{TiO}_2$  mixture.

**Figure 19:** Figure 19 shows a graphical representation of the opacity results from handsheets containing the TiSil brand calcium silicate hydrate and a PCC with 60lb/ton  $\text{TiO}_2$  mixture.

**Figure 20:** Figure 20 shows a graphical representation of the sheet scattering coefficient results from handsheets containing the TiSil brand calcium

silicate hydrate and a PCC with 60lb/ton  $\text{TiO}_2$  mixture.

**Figure 21:** Figure 21 shows a graphical representation of the filler scattering coefficient results from handsheets containing the TiSil brand calcium silicate hydrate and a PCC with 60lb/ton  $\text{TiO}_2$  mixture.

**Figure 22:** Figure 22 shows a graphical representation of the sheet stiffness results from handsheets containing the TiSil brand calcium silicate hydrate and a PCC with 60lb/ton  $\text{TiO}_2$  mixture.

**Figure 23:** Figure 23 shows a graphical representation of the sheet bulk results from handsheets containing the TiSil brand calcium silicate hydrate and a PCC with 60lb/ton  $\text{TiO}_2$  mixture.

**Figure 24:** Figure 24 shows a graphical representation of the porosity results from handsheets containing the TiSil brand calcium silicate hydrate and a PCC with 60lb/ton  $\text{TiO}_2$  mixture.

**Figure 25:** Figure 25 shows a graphical representation of the tensile index results from handsheets containing the TiSil brand calcium silicate hydrate and a PCC with 60lb/ton  $\text{TiO}_2$  mixture.

**Figure 26:** Figure 26 shows a graphical representation of the opacity results from handsheets containing the TiSil brand calcium silicate hydrate and Bulkite.

**Figure 27:** Figure 27 shows a graphical representation of the sheet scattering coefficient results from handsheets containing the TiSil brand calcium silicate hydrate and Bulkite.

**Figure 28:** Figure 28 shows a graphical representation of the filler scattering coefficient results from handsheets containing the TiSil brand calcium silicate hydrate and Bulkite.

**Figure 29:** Figure 29 shows a graphical representation of the brightness results from handsheets containing the TiSil brand calcium silicate hydrate and Bulkite.

**Figure 30:** Figure 30 shows a graphical representation of the porosity results from handsheets containing the TiSil brand calcium silicate hydrate and Bulkite.

**Figure 31:** Figure 31 shows a graphical representation of the opacity results from newsprint handsheets containing 6% (interpolated) of the TiSil brand

calcium silicate hydrate, HuberSil, and Huber Carbonate.

**Figure 32:** Figure 32 shows a graphical representation of the ink penetration results from newsprint handsheets containing 6% (interpolated) of the TiSil brand calcium silicate hydrate, HuberSil, and Huber Carbonate.

**Figure 33:** Figure 33 shows a graphical representation of the show through results from newsprint handsheets containing 6% (interpolated) of the TiSil brand calcium silicate hydrate, HuberSil, and Huber Carbonate.

**Figure 34:** Figure 34 shows a graphical representation of the print through results from newsprint handsheets containing 6% (interpolated) of the TiSil brand calcium silicate hydrate, HuberSil, and Huber Carbonate.

**Figure 35:** Figure 35 shows a graphical representation of the sheet porosity results from newsprint handsheets containing 6% (interpolated) of the TiSil brand calcium silicate hydrate, HuberSil, and Huber Carbonate.

**Figure 36:** Figure 36 shows a graphical representation of the tensile index results from newsprint

handsheets containing 6% (interpolated) of the calcium silicate hydrate TiSil, HuberSil, and Huber Carbonate.

**Figure 37:** Figure 37 shows a graphical representation of the sheet stiffness results from newsprint handsheets containing 6% (interpolated) of the calcium silicate hydrate TiSil, HuberSil, and Huber Carbonate.

**Figure 38:** Figure 38 shows a graphical representation of the static coefficient of friction results from newsprint handsheets containing 6% (interpolated) of the TiSil brand calcium silicate hydrate, HuberSil, and Huber Carbonate.

**Figure 39:** Figure 39 shows a graphical representation of the sheet smoothness results from newsprint handsheets containing 6% (interpolated) of the TiSil brand calcium silicate hydrate, HuberSil, and Huber Carbonate.